

WAAS CH 82019 W02A	APP CRS 024°	Rwy Idg 5000 TDZE 890 Apt Elev 892
--	------------------------	---

RNAV (GPS) RWY 2

NEVADA MUNI (NVD)

RNP APCH - GPS.


▼

▲ NA


Circling NA to Rwy 13 and 31. Baro-VNAV and VDP NA when using Joplin altimeter setting.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.
When local altimeter setting not received, use Joplin altimeter setting: increase LPV DA to 1200 feet; increase LNAV/VNAV DA to 1329 feet and all visibilities ¼ SM; increase all MDAs 120 feet and LNAV visibility Cat C ¾ SM, and Circling visibility Cat C ¼ SM.

MISSED APPROACH:
Climb to 3000 direct STARE and hold.

AWOS-3PT 119.175	KANSAS CITY CENTER 125.55 327.0	UNICOM 122.8 (CTAF) 0
----------------------------	---	---------------------------------

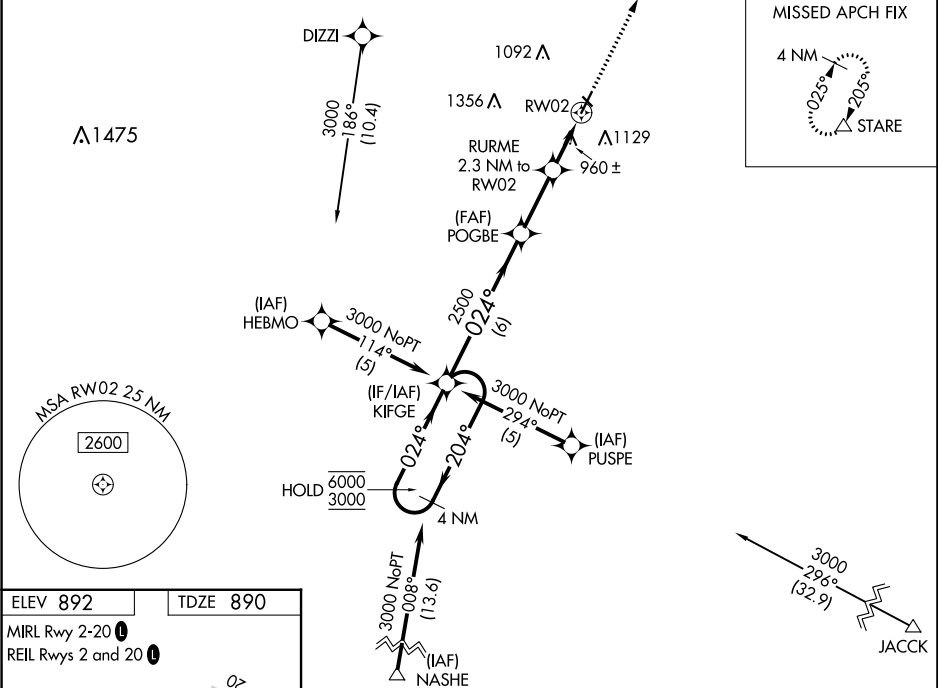

ELEV 892	TDZE 890
MIRL Rwy 2-20 0	
REIL Rwy 2 and 20 0	

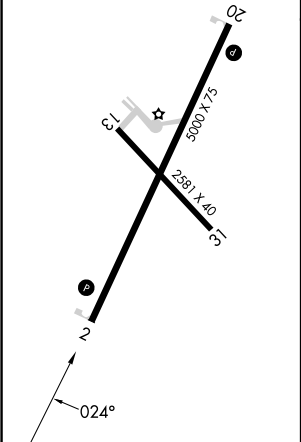

4 NM Holding Pattern				KIFGE		POGBE		RURME 2.3 NM to RW02		0.9 NM to RW02		3000	STARE
6000 ← 204°				204°		2500		1660		RW02		↑	△
GP 3.00° TCH 45				2500		2500		1.4 NM		0.9 NM			
				6 NM		2.6 NM		1.4 NM		0.9 NM			
CATEGORY	A		B		C		D						
LPV DA	1090-1		200 (200-1)				NA						
LNAV/VNAV DA	1219-1		329 (400-1)				NA						
LNAV MDA	1220-1		330 (400-1)				NA						
CIRCLING	1260-1 368 (400-1)		1440-1 548 (600-1)		1440-1½ 548 (600-1½)		NA						