

BARTOW, FLORIDA

AL-5838 (FAA)

23278

WAAS CH 63112 W23A	APP CRS 230°	Rwy Idg 5001 TDZE 124 Apt Elev 125
--	------------------------	---

RNAV (GPS) RWY 23
BARTOW EXEC (BOW)

RNP APCH.

T Rwy 23 helicopter visibility reduction below $\frac{3}{4}$ SM NA. When local altimeter setting not received, use Tampa Intl altimeter setting and increase LPV DA to 560 feet, LNAV/VNAV DA to 681 feet and all MDA 120 feet, increase LPV all Cats visibility $\frac{1}{4}$ SM, LNAV/VNAV all Cats $\frac{1}{8}$ SM, LNAV Cat C $\frac{1}{4}$ SM, Cat D $\frac{1}{2}$ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. VDP and Baro-VNAV NA when using Tampa Intl altimeter setting.

MISSED APPROACH: Climb to 2300 direct FODBI and hold.

AWOS-3 123.775	TAMPA APP CON 120.65 290.3	BARTOW TOWER ★ 121.20 (CTAF)	GND CON 121.9	UNICOM 122.95
--------------------------	--------------------------------------	--	-------------------------	-------------------------

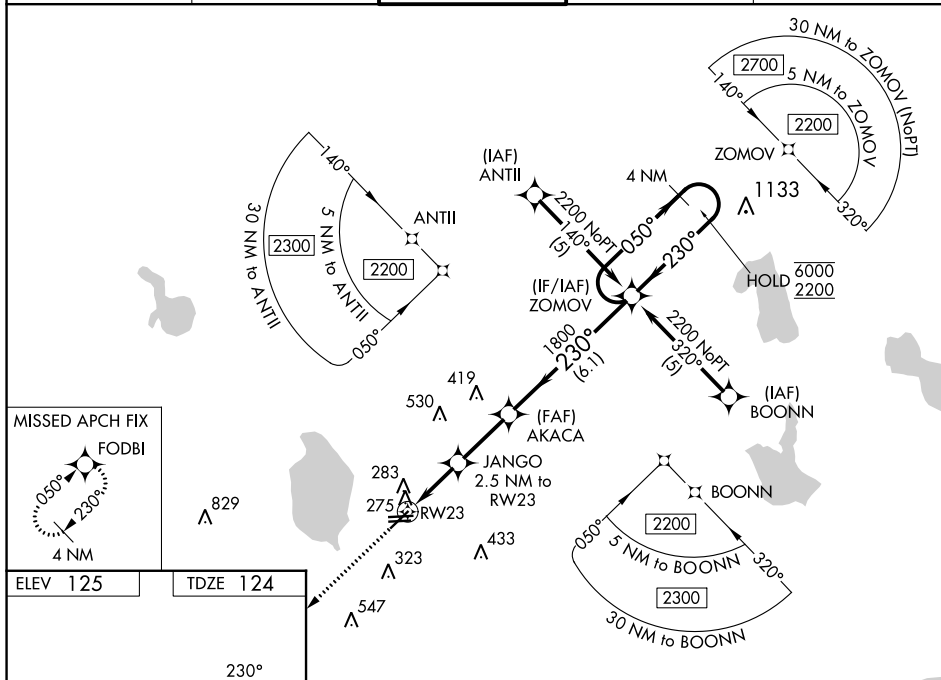


Diagram illustrating the RW23 approach procedure. The left side shows a plan view of the runway layout, including RW23, RW16, RW5, and RW9L. The right side shows a profile view of the approach path, including the 2300 FODBI, the 205± marker, and the 2300 FODBI. The profile view shows the 2300 FODBI, the 205± marker, and the 2300 FODBI.

BARTOW, FLORIDA
Orig-D 07NOV19

27°57'N-81°47'W

BARTOW EXEC (BOW)
RNAV (GPS) RWY 23

SE-3, 16 MAY 2024 to 13 JUN 2024