

BARTOW, FLORIDA

AL-5838 (FAA)

23278

|                                        |                        |                                                               |
|----------------------------------------|------------------------|---------------------------------------------------------------|
| WAAS<br>CH <b>58112</b><br><b>W05A</b> | APP CRS<br><b>050°</b> | Rwy Idg <b>5001</b><br>TDZE <b>123</b><br>Apt Elev <b>125</b> |
|----------------------------------------|------------------------|---------------------------------------------------------------|

# RNAV (GPS) RWY 5


## BARTOW EXEC (BOW)

RNP APCH.

**T** Rwy 5 helicopter visibility reduction below  $\frac{3}{4}$  SM NA. When local altimeter setting not received, use Tampa Intl altimeter setting and increase LPV DA to 553 feet, LNAV/VNAV DA to 684 feet and all MDA 120 feet, increase LNAV Cat C visibility  $\frac{1}{4}$  SM, Cat D  $\frac{1}{2}$  SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. VDP and Baro-VNAV NA when using Tampa Intl altimeter setting.

**MISSED APPROACH:**  
Climb to 2300 direct  
ZOMOV and hold.

|                          |                                      |                                         |                         |                         |
|--------------------------|--------------------------------------|-----------------------------------------|-------------------------|-------------------------|
| AWOS-3<br><b>123.775</b> | TAMPA APP CON<br><b>120.65 290.3</b> | BARTOW TOWER ★<br><b>121.2 0</b> (CTAF) | GND CON<br><b>121.9</b> | UNICOM<br><b>122.95</b> |
|--------------------------|--------------------------------------|-----------------------------------------|-------------------------|-------------------------|

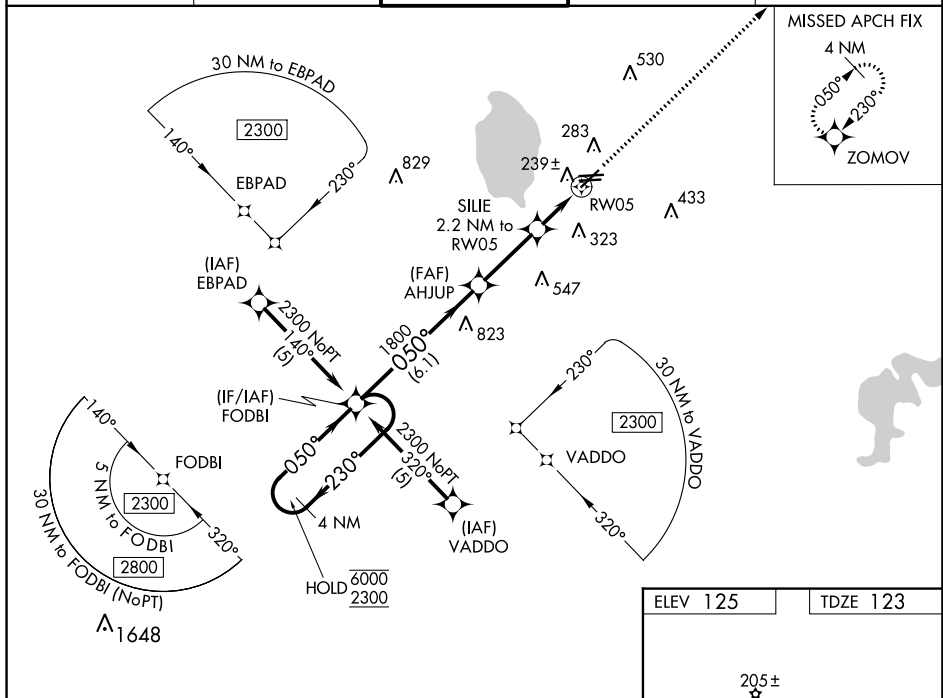



MISSED APCH FIX

4 NM

050°

230°

70MOV

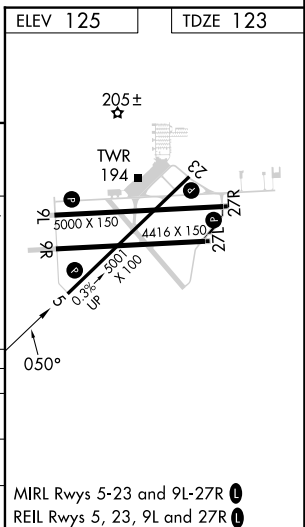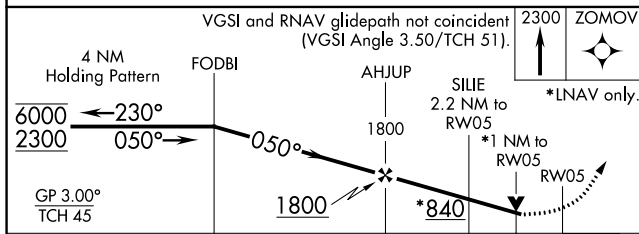

BARTOW, FLORIDA  
Orig-D 07NOV19

27°57'N-81°47'W

BARTOW EXEC (BOW)  
RNAV (GPS) RWY 5

SE-3, 16 MAY 2024 to 13 JUN 2024