

LOC RWY 6
MIFFLIN COUNTY (RVL)

MISSED APPROACH: Climb to 3000 then climbing right turn to 4000 on heading 147° and RAV VORTAC R-290 to HERDA INT/RAV 30 DME and hold.

ALTERNATE MISSED
APCH FIX





Figure 1: Schematic diagram of the RAV system. A laser beam (indicated by a dashed arrow) is directed at a sample. The sample is a circular disk with a central hole. The disk is labeled "MSA PSB 25 NM" and "4200". The central hole is labeled "2259 Å". The disk is mounted on a base labeled "R-290". The base is labeled "114.6 RAV" and "Chan 93". The base is also labeled "1910 ± Å".

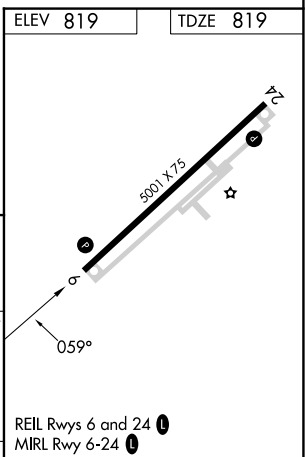

40°41'N-77°38'W

MIFFLIN COUNTY (RVL)
LOC RWY 6