

APP CRS
301°

Rwy Idg
TDZE
Apt Elev

5000
1070
1086

RNAV (GPS) RWY 30

MONROE MUNI (EFT)

RNP APCH-GPS.

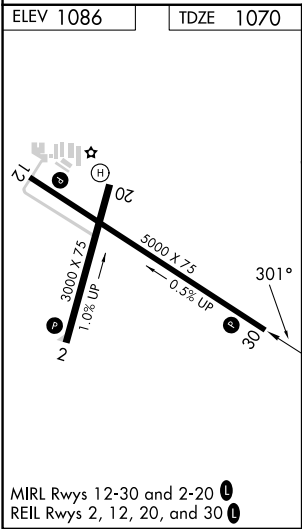
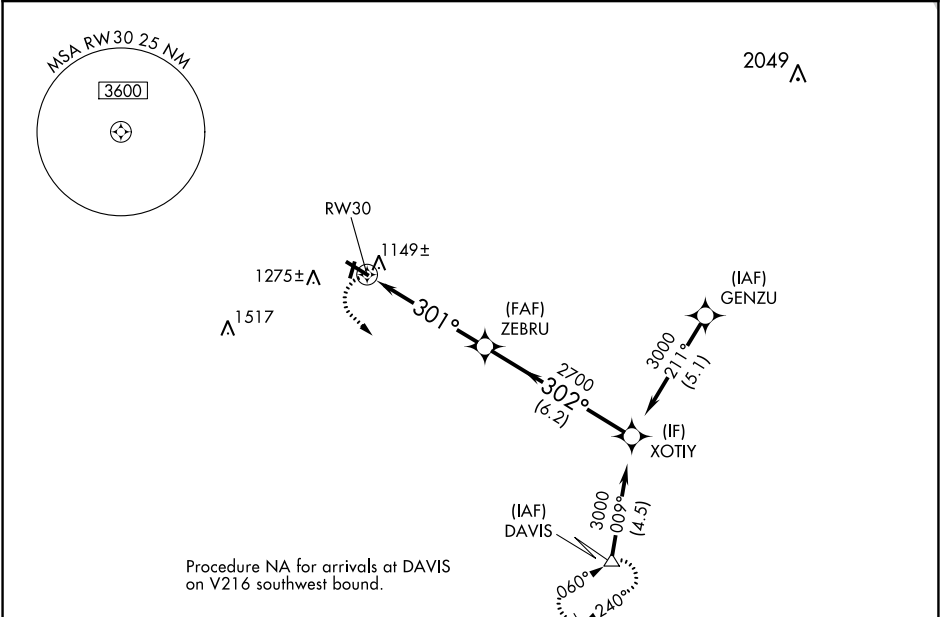
When local altimeter setting not received, use Albeturs altimeter setting and increase all MDA 100 feet, increase LNAV Cat C/D and Circling Cat C visibility ¼ mile.
VDP NA when using Albeturs altimeter setting. Rwy 30 helicopter visibility reduction below ¾ SM NA. Circling to Rwy 2-20 NA at night.





MISSED APPROACH:
Climbing left turn to 3000
direct DAVIS and hold.

AWOS-3
118.375

ROCKFORD APP CON
126.0 327.0

UNICOM
123.05 (CTAF) 0



				
3000		DAVIS		
				
RW30		XOTIY		
1.2 NM to RW30		3000		
301°		302°		
3.04° TCH 42		ZEBRU		
1.2		2700		
3.8 NM		6.2 NM		
Procedure Turn NA		Procedure Turn NA		
CATEGORY	A	B	C	D
LNAV MDA	1480-1	410 (400-1)	1480-1¼	410 (400-1¼)
CIRCLING	1540-1 454 (500-1)	1640-1 554 (600-1)	1640-1½ 554 (600-1½)	1640-2 554 (600-2)