


WAAS CH 50214 W25A	APP CRS 255°	Rwy Idg TDZE Apt Elev	5253 400 400
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 25R
LIVERMORE MUNI (LVK)

⚠ Circling to Rwy 25L NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C (23°F) or above 54°C (130°F). Circling NA north of Rwy 7L-25R. RADAR Required. DME/DME RNP-0.3 NA. For inop ALS, increase LNAV Cat C/D to 1½ SM.	MALSR MISSED APPROACH: Climb to 4000 direct DRNAV and on track 317° to WHYEE.
--	---

ATIS 119.65	NORCAL APP CON 123.85 278.3	LIVERMORE TOWER ★ 118.1(CTAF) 0 239.25	GND CON 121.6	UNICOM 122.95
--------------------------------------	--	---	--	--

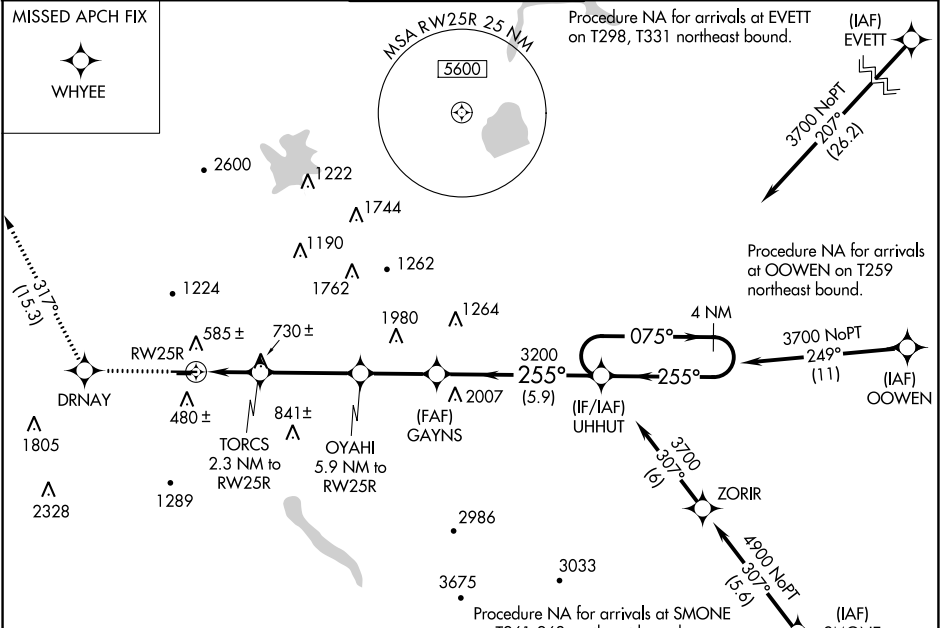

ELEV 400	TDZE 400
----------	----------

MIRL Rwy 7R-25L
HIRL Rwy 7L-25R

4000 DRNAY tr 317° WHYEE 3817 3065 3380				
LNAV only TORCS 2.3 NM to RW25R OYAH1 5.9 NM to RW25R GAYNS 3200 UHHUT 4 NM Holding Pattern 075° → 3700 ← 255° 255° 3200 2320 1180* GP 3.00° TCH 47 RW25R *1.7 NM to RW25R 1.7 NM 0.6 NM 3.6 NM 2.7 NM 5.9 NM				
CATEGORY	A		B	C
LPV DA	600-½		200 (200-½)	
LNAV/VNAV DA	843-⅞		443 (500-⅞)	
LNAV MDA	980-½	580 (600-½)	980-1¼	580 (600-1¼)
CIRCLING	980-1	580 (600-1)	1140-2 740 (800-2)	1780-3 1380 (1400-3)