

WAAS	APP CRS	Rwy Idg	5310
CH 77882	155°	TDZE	689
W16A		Apt Elev	689

RNAV (GPS) RWY 16



ABERNATHY FLD (GZS)

RNP APCH - GPS.

▼ Procedure NA at night. Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Huntsville Exec Tom Sharp Jr Fld altimeter setting: increase all MDA 100 feet and visibility LP and LNAV Cats C/D ½ SM and Circling Cats A/B ¼ SM and Cat C ½ SM.

MISSED APPROACH: Climb to 3000 direct ZEWGU and hold.

AWOS-3 118.275	MEMPHIS CENTER 125.85 379.25	UNICOM 122.8 (CTAF)
-------------------	---------------------------------	------------------------

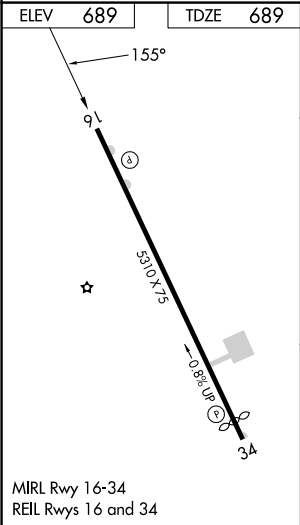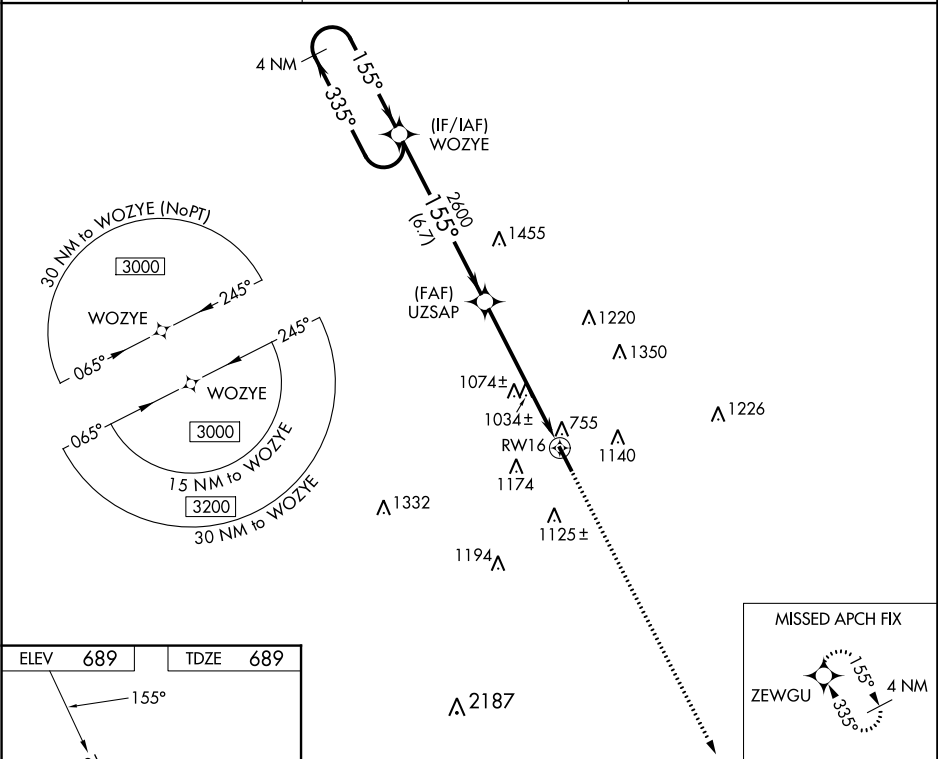

4 NM Holding Pattern WOZYE		Visual Segment-Obstacles.		3000	ZEWGU
3000 ← 335° → 155°		UZSAP		2600	RW16
		6.7 NM		5.9 NM	
CATEGORY	A	B	C	D	
LP MDA	1300-1	611 (700-1)	1300-1¾	611 (700-1¾)	
LNAV MDA	1340-1	651 (700-1)	1340-1⅞	651 (700-1⅞)	
CIRCLING	1420-1 731 (800-1)	1480-1 791 (800-1)	1480-2¼ 791 (800-2¼)	1640-3 951 (1000-3)	