

WAAS CH 40238 W27A	APP CRS 273°	Rwy Idg TDZE Apt Elev	3641 708 708
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 27

ARENS FLD (RWN)

Baro-VNAV NA. Use Knox altimeter setting; when not received, use Rochester altimeter setting and increase all DA/MDA 20 feet and LNAV/VNAV all Cts visibility 1/8 mile. DME/DME RNP-0.3 NA. Helicopter visibility reduction below 3/4 SM NA.

MISSED APPROACH: Climb to 2400 direct ITELE and hold.

OXI AWOS-3 135.775	SOUTH BEND APP CON ★ 132.05 257.8	UNICOM 122.8 (CTAF) 0
------------------------------	---	---------------------------------

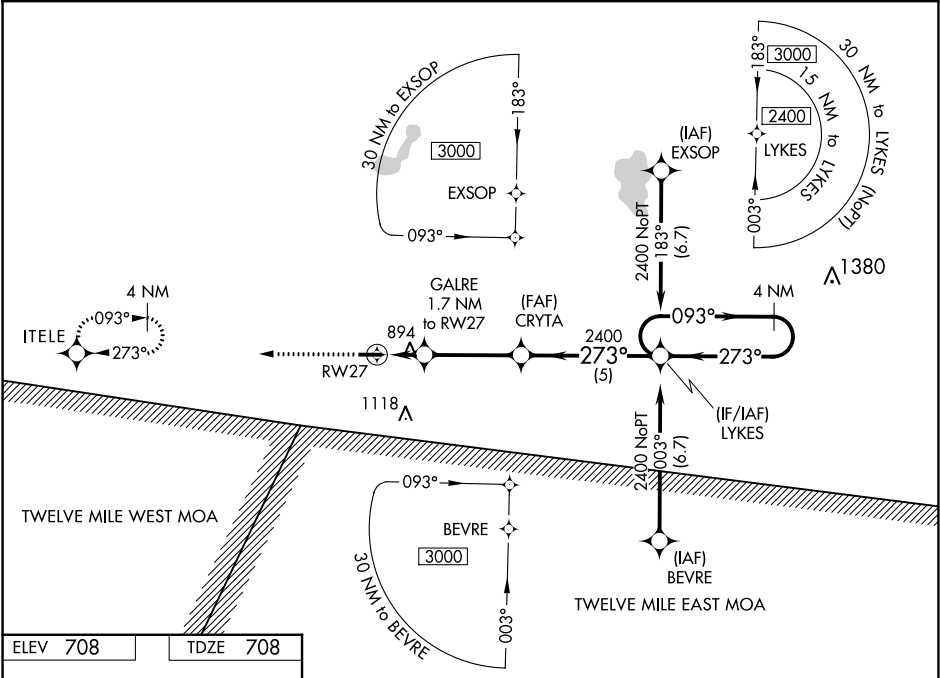

ELEV 708

TDZE 708

MIRL Rwy 9-27

REIL Rws 9 and 27

2400 ITELE VGSI and RNAV glidepath not coincident (VGSI Angle 3.50/TCH 23).				4 NM Holding Pattern	
*LNAV only.		CRYTA 2400		LYKES	
GALRE 1.7 NM to RW27		273°		093° → 2400	
RW27		*1280		← 273°	
→ 1.7 NM		→ 3.5 NM		→ 5 NM	
CATEGORY	A	B	C	D	
LPV DA	995-1		287 (300-1)		NA
LNAV/VNAV DA	1224-1¾		516 (600-1¾)		NA
LNAV MDA	1200-1		492 (500-1)		1200-1¾ 492 (500-1¾)
CIRCLING	1240-1		532 (600-1)		1480-2¼ 772 (800-2¼)