

WAAS CH 40403 W36A	APP CRS 359°	Rwy Idg 4002 TDZE 682 Apt Elev 691
--	------------------------	---

RNAV (GPS) RWY 36

LITCHFIELD MUNI (3LF')


RNP APCH - GPS.

▼

Baro-VNAV and VDP NA when using Taylorville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Taylorville altimeter setting and increase LPV DA to 1005 feet and all visibilities ¼ SM, increase LNAV/VNAV DA to 1145 and all visibilities ¼ SM; increase all MDAs 80 feet and increase LNAV Cat C visibility ½ SM.

MISSED APPROACH: Climb to 3000 direct KUYLE and hold.

AWOS-3PT 118.175	ST. LOUIS APP CON 124.2 353.9	UNICOM 122.8 (CTAF) 0
----------------------------	---	---------------------------------

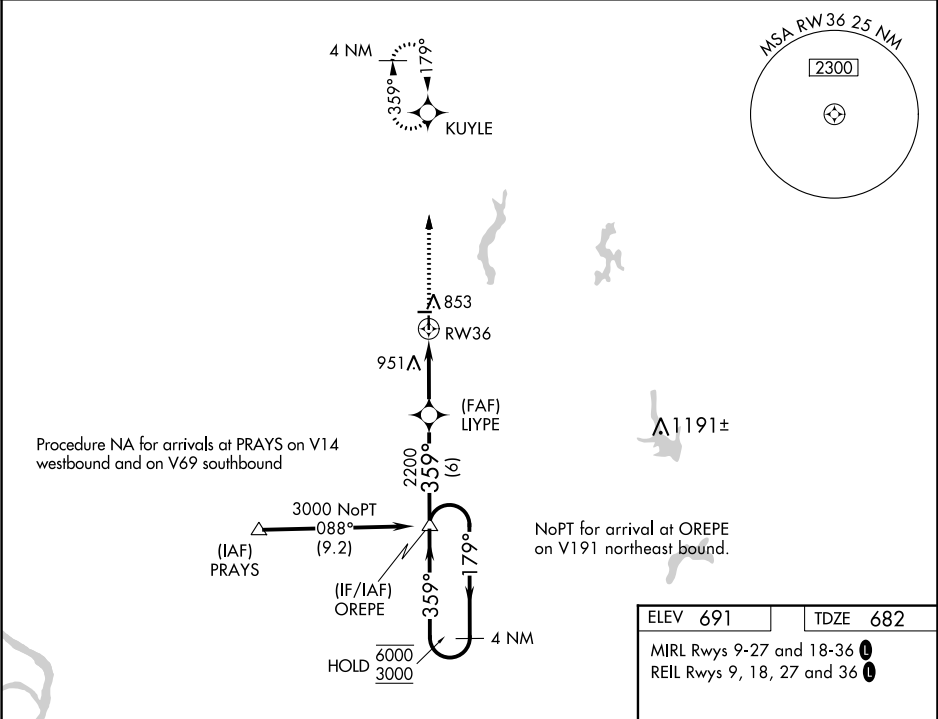

ELEV 691	TDZE 682
MIRL Rwy 9-27 and 18-36 1	
REIL Rwy 9, 18, 27 and 36 1	

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 25).		3000	KUYLE
6000 3000		OREPE		2200	1.4 NM to RW36
GP 3.00° TCH 40		LIYPE			
179° 359°		359°		RW36	RW36
2200		6 NM			
3.3 NM		1.4		RW36	
CATEGORY	A	B	C	D	
LPV DA	932-3/4 250 (300-3/4)			NA	
INAV/ VNAV	DA	1072-1 1/8 390 (400-1 1/8)			NA
INAV MDA	1140-1	458 (500-1)	1140-1 3/8 458 (500-1 3/8)	NA	