

WAAS CH 53316 W35A	APP CRS 351°	Rwy Idg TDZE Apt Elev	5000 5 5
--	------------------------	-----------------------------	-------------------------------------



RNAV (GPS) RWY 35
MARCO ISLAND EXEC (MKY)

PBN APCH.

Baro-VNAV and VDP NA when using Naples altimeter setting. Rwy 35 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Naples altimeter setting and increase LPV DA to 312 feet; increase LNAV/VNAV DA to 420 feet; increase all MDAs 40 feet and visibility Cat C ¼ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 2°C or above 54°C.

MISSED APPROACH: Climb to 3000 direct AVCOF and hold, continue climb-in-hold to 3000.

AWOS-3PT 120.075	FORT MYERS APP CON ★ 124.125 371.85	CLNC DEL 120.8	UNICOM 122.7 (CTAF)
----------------------------	---	--------------------------	-------------------------------

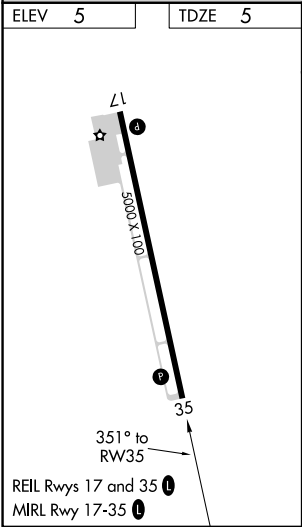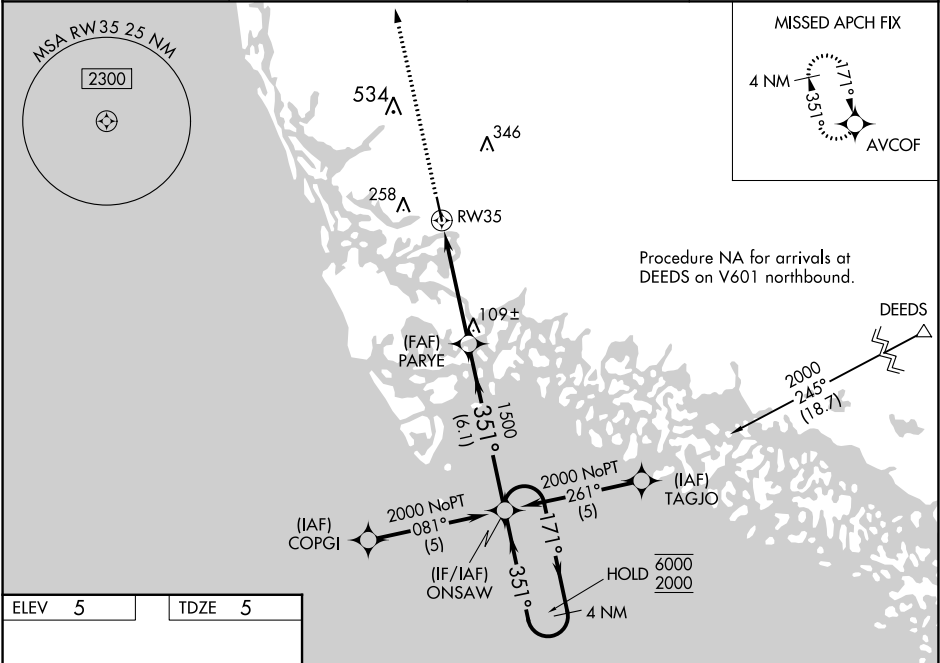

ELEV 5	TDZE 5
3000	AVCOF
VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 32).	
*LNAV only.	PARYE
RW35	1500
1.5 NM to RW35	351°
1.5 NM	3 NM
6.1 NM	171°
ONS AW	6000
4 NM Holding Pattern	2000
GP 3.00°	TCH 40
CATEGORY	A
LPV	DA
LNAV/VNAV	DA
LNAV MDA	520-1 515 (600-1)
CIRCLING	620-1 615 (700-1)