

LOC I-MQJ 108.7	APP CRS 252°	Rwy Idg TDZE Apt Elev	6005 860 862
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 25

INDIANAPOLIS RGNL (MQJ)

▼


▲ NA

When local altimeter setting not received, use Indianapolis Intl altimeter setting and increase all DA 55 feet and all MDA 60 feet, increase S-LOC 25 Cats C/D visibility ½ mile and Circling Cat D visibility ¼ mile.

MALSR

MISSED APPROACH: Climb to 1400 then climbing left turn to 2400 on SHB VOR/DME R-334 to SHB VOR/DME and hold.

AWOS-3PT 124.175	INDIANAPOLIS APP CON 127.15 317.8	CLNC DEL 119.25	UNICOM 122.975 (CTAF)
----------------------------	---	---------------------------	---------------------------------

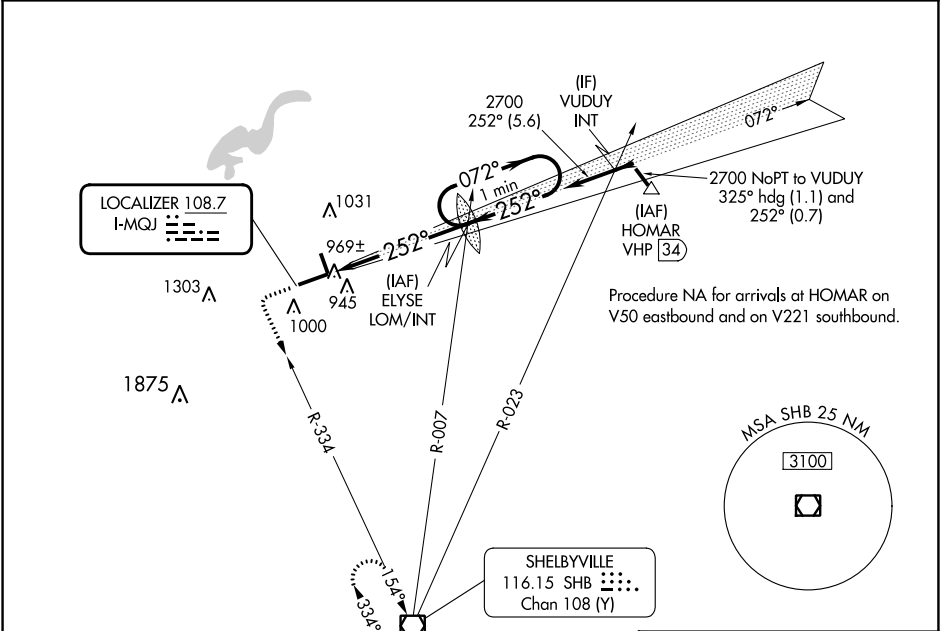

1400

2400

SHB

↑

SHB R-334

ELYSE LOM/INT

2660

One Minute Holding Pattern

072°

252°

2700

2700

GS 3.00°

TCH 53

5.4 NM

CATEGORY	A	B	C	D
S-ILS 25	1060-½ 200 (200-½)			
S-LOC 25	1220-½	360 (400-½)	1220-⅝	360 (400-⅝)
◻ CIRCLING	1340-1	478 (500-1)	1360-1½	1660-2½
			498 (500-1½)	798 (800-2½)

ELEV 862

TDZE 860

REIL Rwy 7 and 34
HIRL Rwy 7-25
MIRL Rwy 16-34

FAF to MAP 5.4 NM

Knots	60	90	120	150	180
Min:Sec	5:24	3:36	2:42	2:10	1:48

EC-2, 18 APR 2024 to 16 MAY 2024

EC-2, 18 APR 2024 to 16 MAY 2024