

APP CRS
173°

Rwy Idg
TDZE
Apt Elev

4001
1551
1551

RNAV (GPS) RWY 17

WATONGA RGNL (JWG)

RNP APCH - GPS.

When local altimeter setting not received, use Clinton altimeter setting and increase all


NA MDA 100 feet; increase LNAV Cat C visibility 3⁄8 SM and Circling Cat C visibility 1⁄4 SM.

MISSED APPROACH: Climbing left turn to 4000 direct ASEHU and hold.

AWOS-3
134.175

VANCE APP CON ★
126.75 346.325

UNICOM
122.8 (CTAF) 0

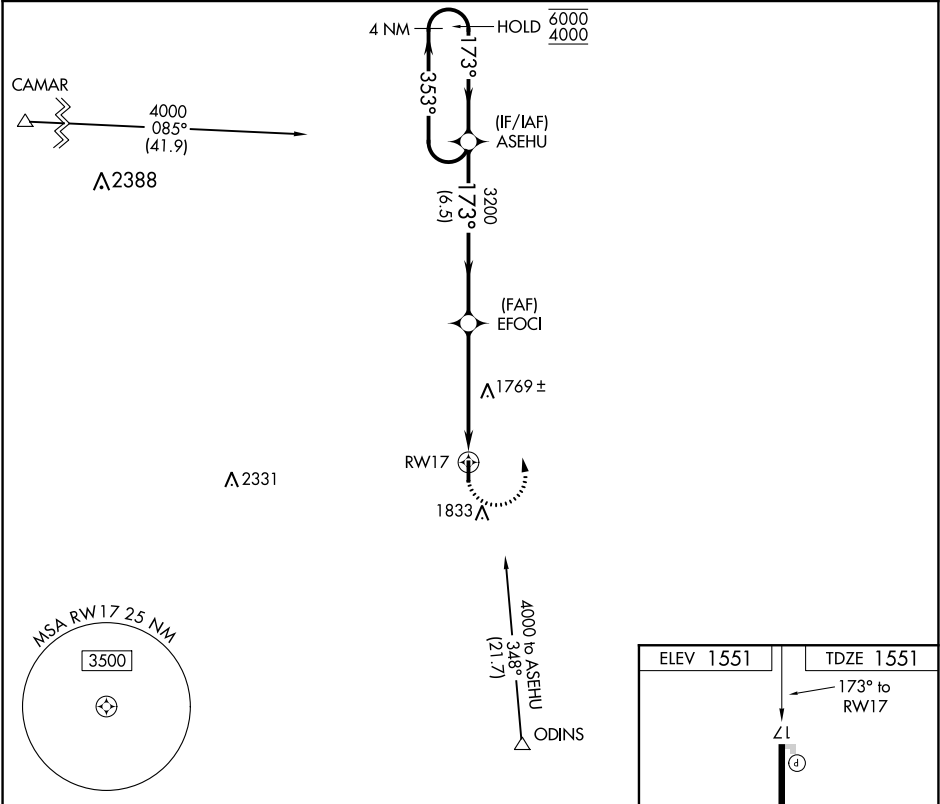

4 NM Holding Pattern ASEHU

6000 4000 353° 173°

3200 EFOCI

3.04° TCH 40

6.5 NM 5 NM

4000 ASEHU

RWY17

CATEGORY	A	B	C	D
LNAV MDA	2060-1	509 (600-1)	2060-1 ^{3⁄8} 509 (600-1 ^{3⁄8})	NA
CIRCLING	2060-1 509 (600-1)	2240-1 689 (700-1)	2240-2 689 (700-2)	NA

ELEV 1551 TDZE 1551

173° to RWY17

4001 X 60

0.5% UP

35

MIRL Rwy 17-35 0