

WAAS
CH **97434**
W22A

APP CRS
218°

Rwy Idg
TDZE
Apt Elev
4204
1378
1379

RNAV (GPS) RWY 22

EL DORADO/CAPT JACK THOMAS MEML (EQA)

▼


⚠ NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Colonel James Jabara altimeter setting and increase all DA 51 feet and all MDA 60 feet; increase LNAV/VNAV all Cats visibility ½ mile. Baro-VNAV and VDP NA when using Colonel James Jabara altimeter setting.

MISSED APPROACH:

Climb to 3000 direct CERVK and hold.

AWOS-3P 120.875	WICHITA APP CON 134.8 269.1	UNICOM 122.8 (CTAF) 0
---------------------------	---------------------------------------	---------------------------------

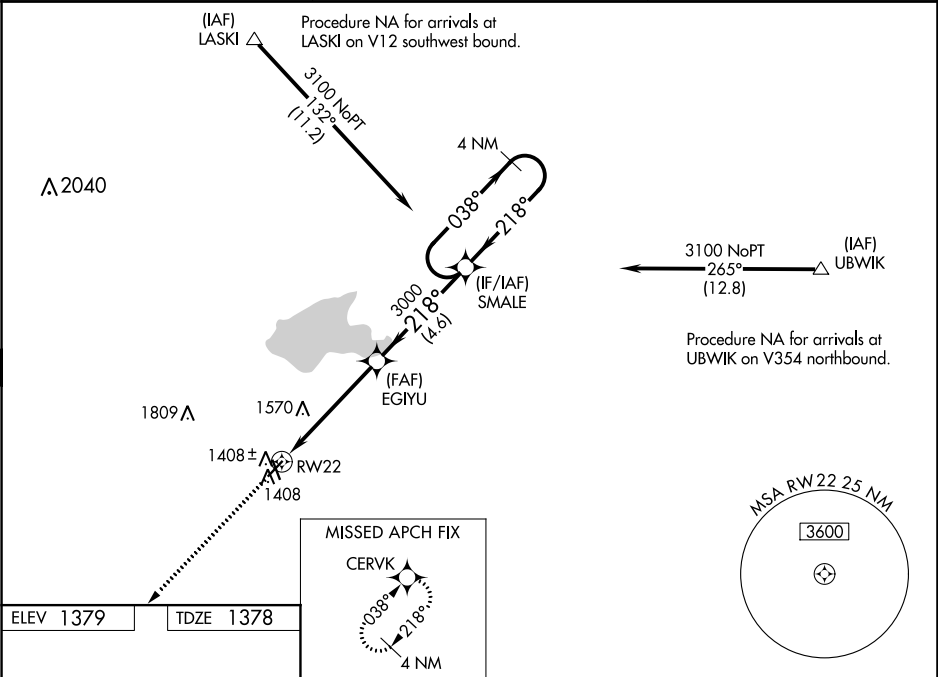

218° to RW22

218° to RW22

4204 X 75

4200 X 75

33

HIRL Rwy's 4-22 and 15-33

3000

↑

CERVK

⬆

*LNAV only

*1.5 NM to RW22

RW22

EGIYU

3000

SMALE

4 NM Holding Pattern

038°

218°

3100

GP 3.00°

TCH 40

1.5

3.5 NM

4.6 NM

CATEGORY	A	B	C	D
LPV DA	1578-1	200 (200-1)	NA	
LNAV/VNAV DA	1671-1	293 (300-1)	NA	
LNAV MDA	1900-1	522 (600-1)	NA	
CIRCLING	1900-1 521 (600-1)	1960-1 581 (600-1)	NA	