


WAAS CH 57917 W01A	APP CRS 008°	Rwy Idg 5000 TDZE 969 Apt Elev 969
--	------------------------	---


RNAV (GPS) RWY 1
LAFAYETTE MUNI (3M7)

RNP APCH - GPS.	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. Obtain local altimeter setting on CTAF; when not received, use Bowling Green altimeter setting: increase LPV DA to 1441 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 1585 feet and all visibilities ½ SM; increase all MDAs 140 feet and visibility LNAV Cat C and D ¼ SM and Circling Cat C and D ½ SM. VDP and Baro-VNAV NA when using Bowling Green altimeter setting. Rwy 1 helicopter visibility reduction below ¾ SM NA.	MISSED APPROACH: Climb to 3000 direct OZESI and hold.
-----------------	---	---

NASHVILLE APP CON 118.4 360.7	UNICOM 122.8 (CTAF)
---	-------------------------------

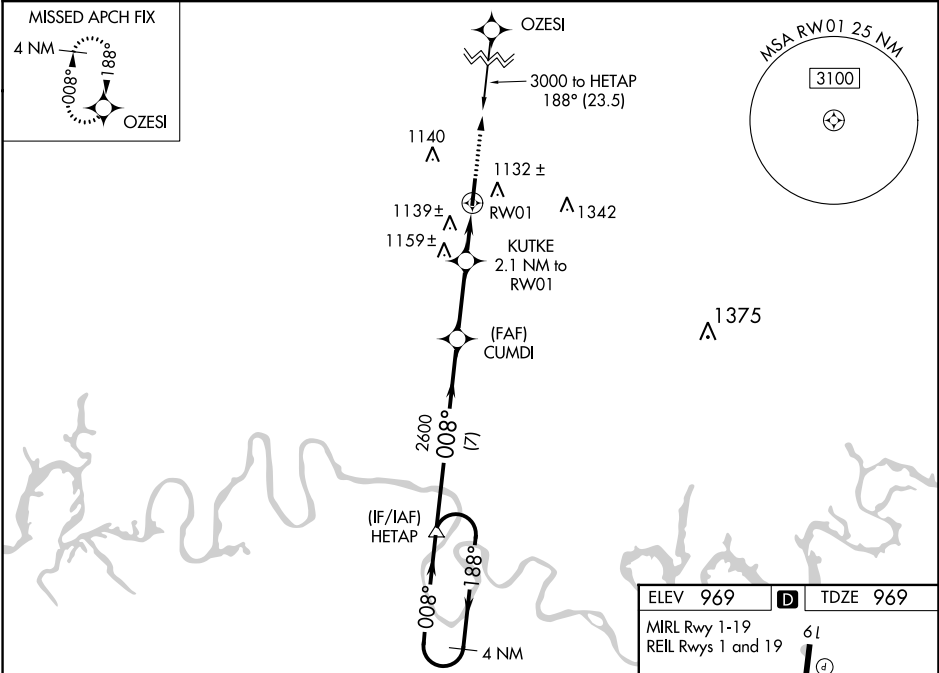

4 NM Holding Pattern	HETAP	VGSI and RNAV glidepath not coincident (VGSI Angle 3.50/TCH 37).	3000	OZESI
GP 3.00°	TCH 45	CUMDI	KUTKE 2.1 NM to RW01	*LNAV only.
188°	008°	008°	2600	*1.1 NM to RW01
7 NM	2.8 NM	1 NM	1.1 NM	
1680				
CATEGORY	A	B	C	D
LPV DA		1318-1¼	349 (400-1¼)	
LNAV/VNAV DA		1452-1¾	483 (500-1¾)	
LNAV MDA	1400-1	431 (500-1)	1400-1¼ 431 (500-1¼)	1400-1½ 431 (500-1½)
CIRCLING	1440-1	471 (500-1)	1600-1¾ 631 (700-1¾)	1700-2¼ 731 (800-2¼)

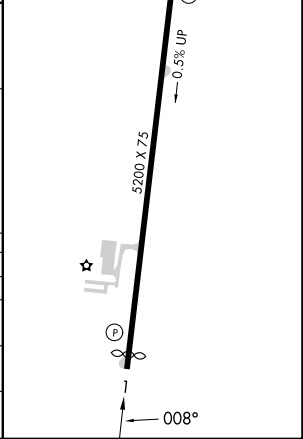

SE-1, 16 MAY 2024 to 13 JUN 2024

SE-1, 16 MAY 2024 to 13 JUN 2024