

APP CRS	Rwy Idg	3201
052°	TDZE	84
	Apt Elev	85

RNAV (GPS) RWY 5

ST GEORGE (6J2)


▼

▲ NA

DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. Use Summerville altimeter setting; when not received, use Charleston altimeter setting and increase all MDAs 40 feet, increase LNAV and Circling Cat C visibility ¼ mile, increase LNAV and Circling Cat D visibility ½ mile. Procedure NA at night.

MISSED APPROACH: Climbing right turn to 2000 direct GUYEY and hold.

CHARLESTON APP CON	UNICOM
120.7 306.925	122.8 (CTAF)

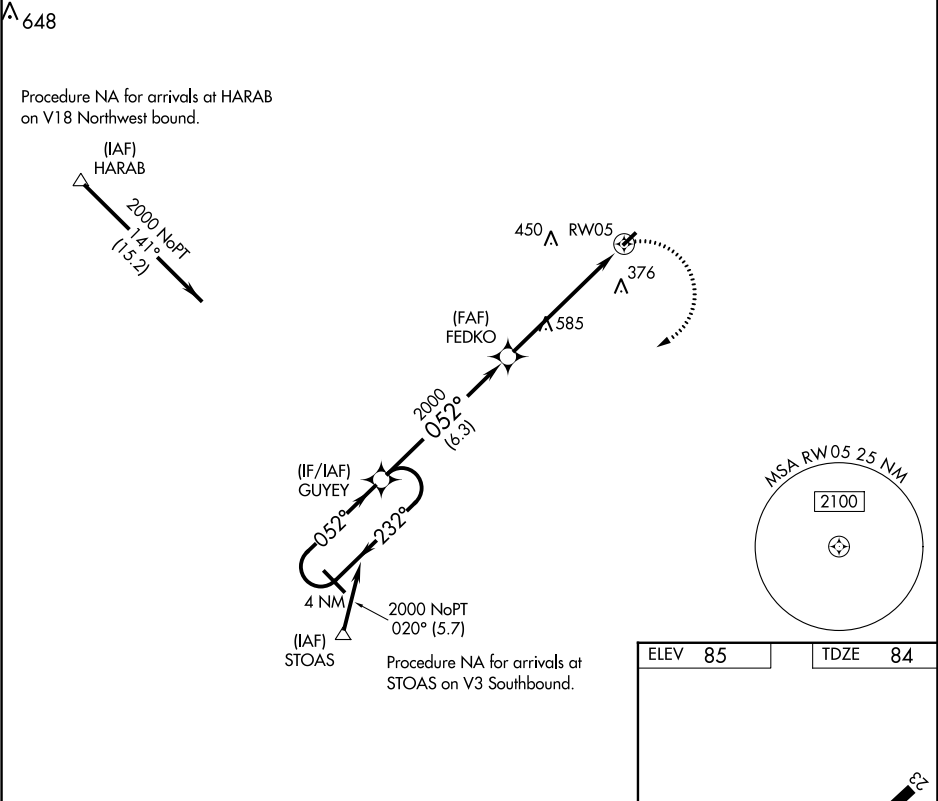

4 NM Holding Pattern					2000	GUYEY
CATEGORY	A	B	C	D		
LNAV MDA	940-1¼	856 (900-1¼)	940-2½ 856 (900-2½)	940-2¾ 856 (900-2¾)		
CIRCLING	940-1¼	855 (900-1¼)	940-2½ 855 (900-2½)	940-2¾ 855 (900-2¾)		

ELEV 85 TDZE 84

ILRL Rwy 5-23