

WAAS CH 69418 W25A	APP CRS 247°	Rwy Idg 3434 TDZE 8 Apt Elev 9
--	------------------------	---

RNAV (GPS) RWY 25

BEAUFORT EXEC (A.R.W)


⚠

ASR


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Beaufort MCAS (Merritt Fld) altimeter setting and increase LPV DA to 226, LNAV/VNAV DA to 352, and all MDA 20 feet. VDP and Baro-VNAV NA when using Beaufort MCAS (Merritt Fld) altimeter setting.

MISSED APPROACH:
Climb to 2000 direct
EROMY and hold.

AWOS-3 119.675	BEAUFORT APP CON★ 125.125 292.125	UNICOM 122.7 (CTAF) 0
--------------------------	---	---------------------------------

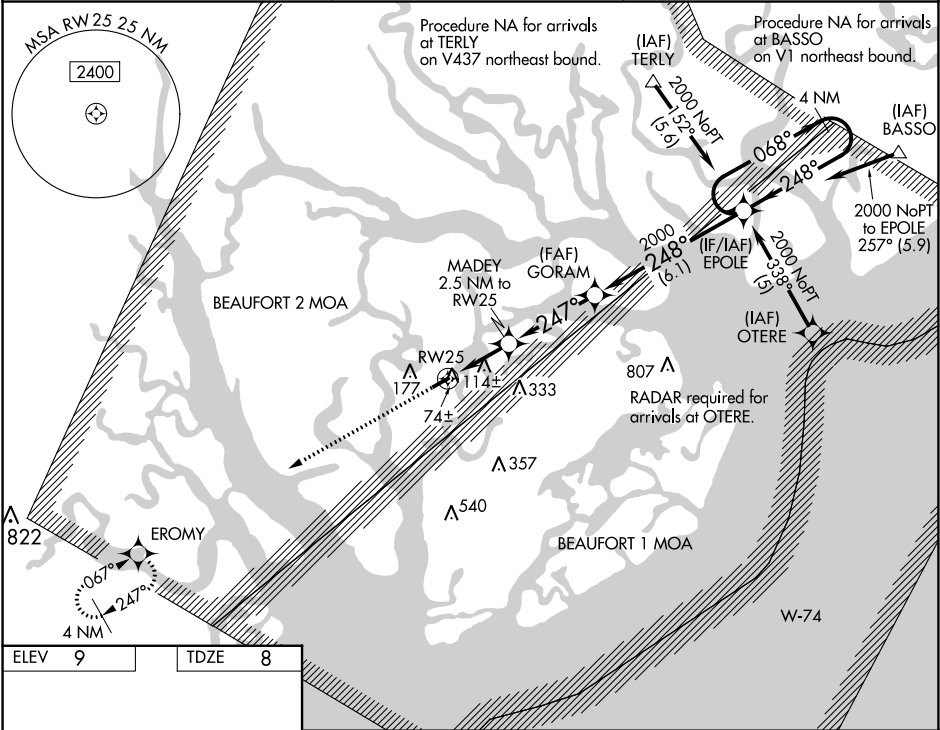

ELEV 9	TDZE 8
---------------	---------------

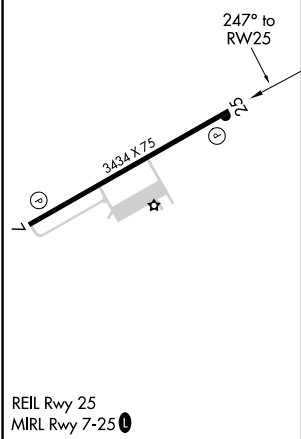

2000 EROMY

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 25).

*LNAV only.

MADEY 2.5 NM to RW25

GORAM 2000

EPOLE

4 NM Holding Pattern

247°

248°

068°

2000

GP 3.00° TCH 40

CATEGORY	A	B	C	D
LPV DA		208-1 200 (200-1)		NA
LNAV/VNAV DA		334-1¼ 326 (400-1¼)		NA
LNAV MDA		380-1 372 (400-1)		NA
CIRCLING	480-1	471 (500-1)	640-1¾ 631 (700-1¾)	NA

SE-2, 16 MAY 2024 to 13 JUN 2024

SE-2, 16 MAY 2024 to 13 JUN 2024