



WAAS CH 61140 W35A	APP CRS 354°	Rwy Idg TDZE 1003 Apt Elev 1003
--	------------------------	---

RNAV (GPS) RWY 35
PERRY MUNI (F22)

NA

For uncompensated Baro-VNAV systems, procedure NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Ponca City altimeter setting. Rwy 35 helicopter visibility reduction below ¾ SM NA. Obtain local altimeter setting on CTAF; when not received, use Ponca City altimeter setting and increase all DA 53 feet and all visibility ¼ SM, increase all MDAs 60 feet and Cat C visibility ¼ SM.

MISSED APPROACH:
Climb to 3000 direct AHOBY and hold.

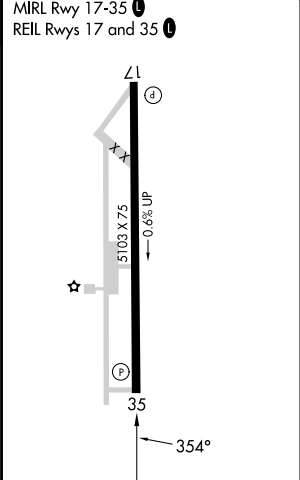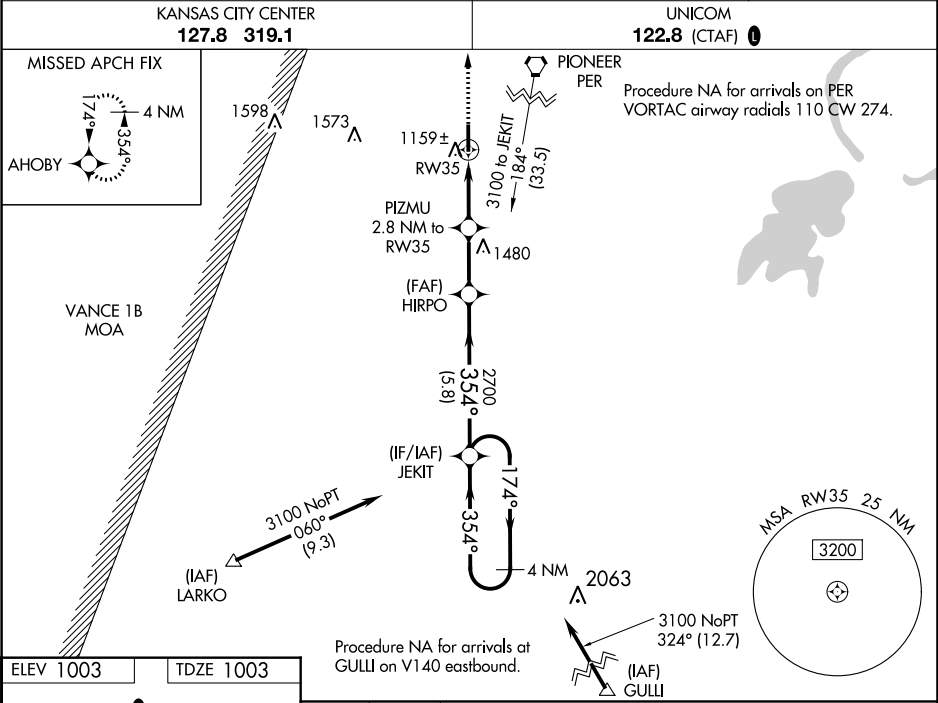

3000

↑

AHOBY

✧

* LNAV only

PIZMU

2.8 NM to RW35

HIRPO

2700

JEKIT

3100

174° →

← 354°

GP 3.00°

TCH 46

* 1.2 NM to RW35

RW35

1940*

2700

1.2

1.6

2.4 NM

5.8 NM

CATEGORY	A	B	C	D
LPV DA	1253-¾ 250 (300-¾)			NA
LNAV/VNAV DA	1330-1⅛ 327 (400-1⅛)			NA
LNAV MDA	1420-1	417 (500-1)	1420-1⅛ 417 (500-1⅛)	NA
CIRCLING	1480-1	477 (500-1)	1620-1¾ 617 (700-1¾)	NA