

WAAS CH 86301 W17A	APP CRS 169°	Rwy Idg 5898 TDZE 1665 Apt Elev 1670
--	------------------------	---


RNAV (GPS) RWY 17

YORK MUNI (JYR)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Aurora altimeter setting and increase all DA/MDA 60 feet and all LPV and LNAV/VNAV visibility ¼ mile. VDP and Baro-VNAV NA when using Aurora altimeter setting.

MISSED APPROACH:
Climb to 4000 direct WIVFO and hold.

AWOS-3 124.175	MINNEAPOLIS CENTER 119.4 278.8	UNICOM 122.8 (CTAF) ⓓ
--------------------------	--	---------------------------------

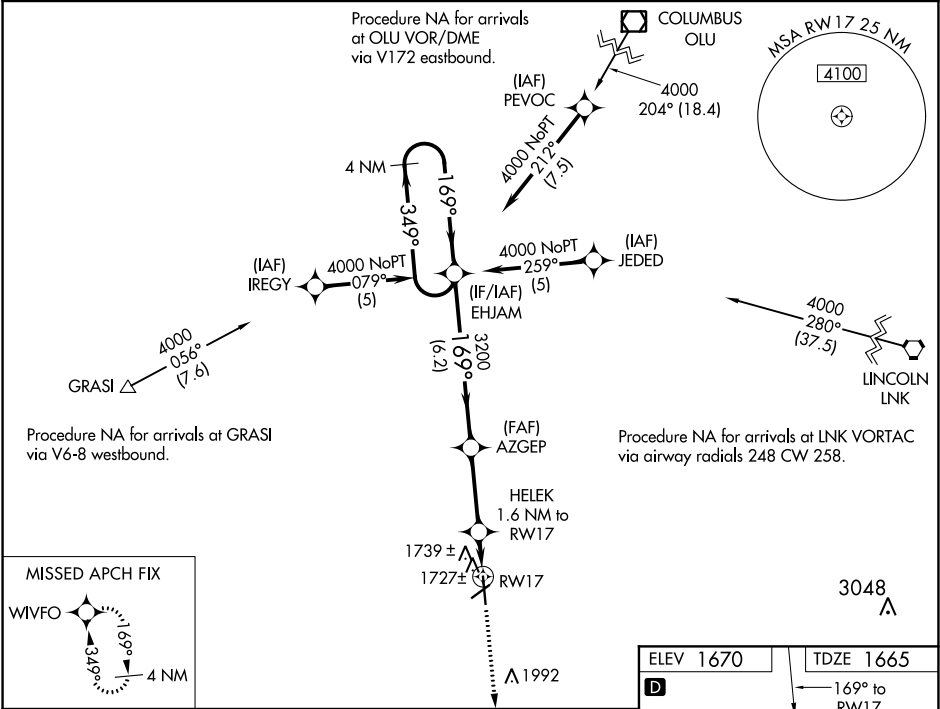

4 NM Holding Pattern				
GP 3.00° TCH 44				
6.2 NM 3 NM 0.7 NM 0.9 NM				
CATEGORY	A	B	C	D
LPV DA	1915-¾ 250 (300-¾)			NA
LNAV/VNAV DA	2031-1¼ 366 (400-1¼)			NA
LNAV MDA	2000-1 335 (400-1)			NA
CIRCLING	2060-1 390 (400-1)	2180-1 510 (600-1)	2200-1½ 530 (600-1½)	NA

