

WAAS CH 86831 W27A	APP CRS 266°	Rwy Idg 4712 TDZE 6037 Apt Elev 6056
--	------------------------	---

RNAV (GPS) RWY 27
SPANISH PEAKS AIRFIELD (4V1)

SPANISH PEAKS AIRFIELD (4V1)

T
A NA


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -26°C (-14°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Trinidad altimeter setting and increase all DA 119 feet and all MDA 120 feet; increase LPV all Cats visibility $\frac{1}{4}$ mile, increase LNAV/VNAV all Cats and LNAV Cats C/D visibility $\frac{3}{8}$ mile. Baro-VNAV and VDP NA when using Trinidad altimeter setting.

MISSED APPROACH:
Climb to 6800 then
climbing right turn to
9400 direct JUKEX
and hold.

AWOS-3
123.6

DENVER CENTER
128.375 379.95

UNICOM
122.8 (CTAF) **L**

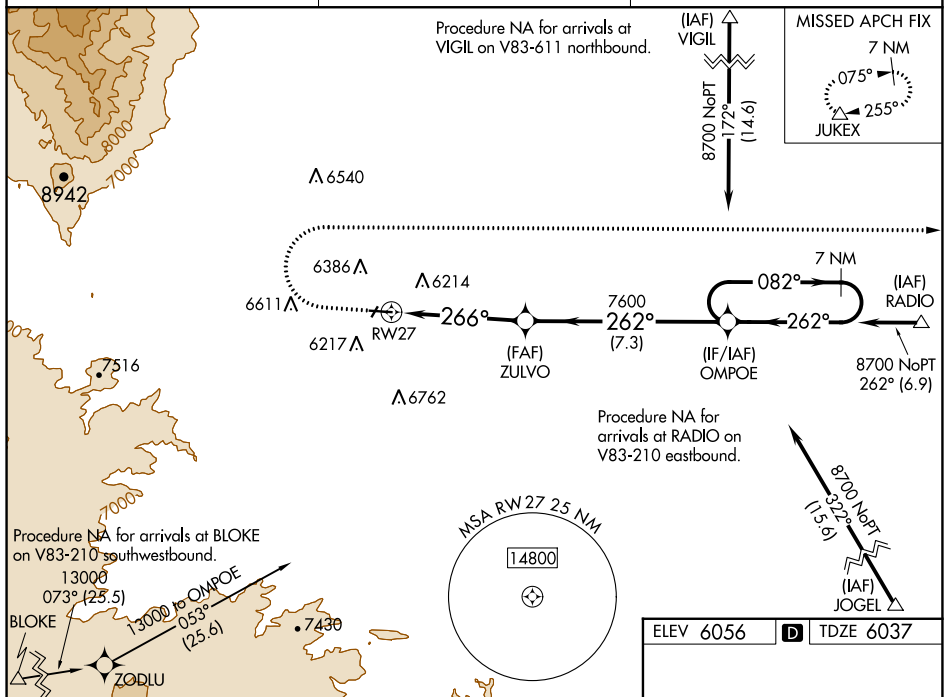

6800 ↑	9400 ↷	JUKE △
-----------	-----------	-----------

*LNAV only *1.4 NM to RW27

RW27

1.4 NM

3.4 NM

7.3 NM

ZULVO
7600

266°

262°

OMPOE

7 NM Holding Pattern

082° →

← 262°

8700


GP 3.00°
TCH 45

CATEGORY	A	B	C	D
LPV DA	6287-1 250 (300-1)			
LNAV/ VNAV DA	6525-1 $\frac{3}{8}$ 488 (500-1 $\frac{3}{8}$)			
LNAV MDA	6520-1 483 (500-1)		6520-1 $\frac{3}{8}$ 483 (500-1 $\frac{3}{8}$)	
 CIRCLING	6720-1 664 (700-1)		7080-3 1024 (1100-3)	7120-3 1064 (1100-3)

ELEV 6056	D	TDZE 6037
-----------	----------	-----------

D

TDZE 6037

MIRL Rwy 9-27 **L**