

WAAS
CH **78301**
W13A

APP CRS
133°

Rwy Idg **4999**
TDZE **18**
Apt Elev **18**

RNAV (GPS) RWY 13


MCCAMPBELL-PORTER (TFP)

RNP APCH-GPS.

⚠ Baro-VNAV NA when using Mustang Beach altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 49°C. When local altimeter setting not received, use Mustang Beach altimeter setting: increase LPV DA to 292 feet; increase LNAV/VNAV DA to 310 feet; increase all MDAs 40 feet and Circling visibility Cat C ¼ SM. VDP NA when using Mustang Beach altimeter setting.

MISSED APPROACH:
Climb to 2000 direct ISICE and hold.

AWOS-3 118.775	CORPUS APP CON 120.9 348.725	UNICOM 122.7 (CTAF) 0
--------------------------	--	---------------------------------

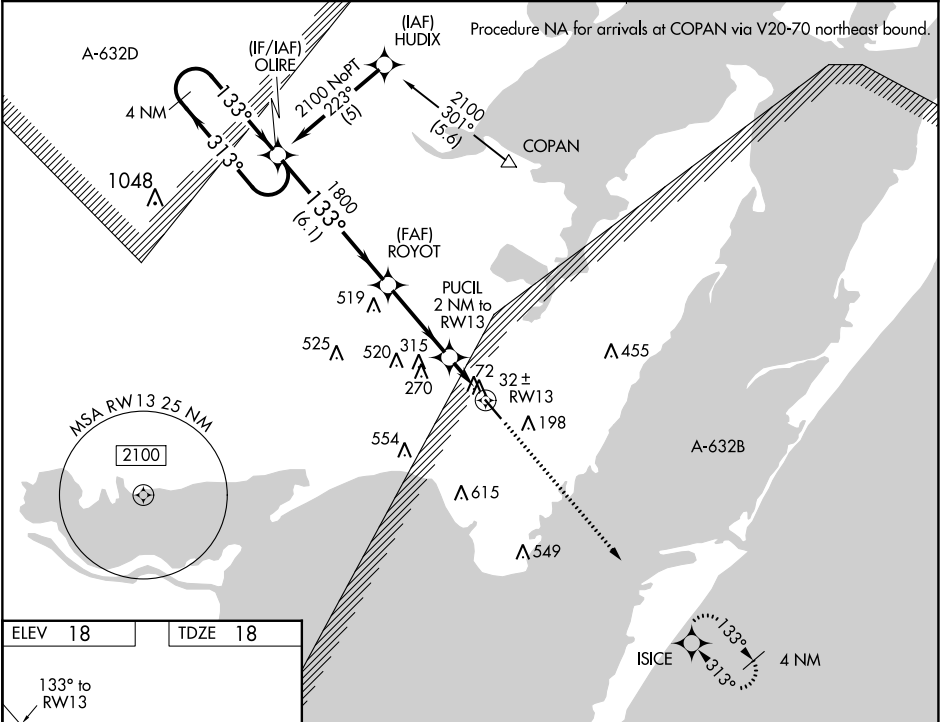

ELEV 18

TDZE 18

133° to RW13

4999 X 75

MIRL Rwy 13-31 0

REIL Rwy 13 and 31

4 NM Holding Pattern

OLIRE

ROYOT

PUCIL 2 NM to RW13

2000

ISICE

2100

313°

133°

1800

700

0.9 NM to RW13

RW13

GP 3.00°

TCH 40

6.1 NM

3.4 NM

1.1 NM

0.9

CATEGORY	A	B	C	D
LPV DA		268-¾	250 (300-¾)	
LNAV/VNAV DA		286-⅞	268 (300-⅞)	
LNAV MDA		340-1	322 (400-1)	
CIRCLING	520-1	502 (600-1)	860-2½ 842 (900-2½)	980-3 962 (1000-3)