

WAAS CH 62928 W28A	APP CRS 280°	Rwy Idg 4549 TDZE 928 Apt Elev 928
--	------------------------	---


RNAV (GPS) RWY 28
BOGGS FLD (USW)

RNP APCH.


T Rwy 28 helicopter visibility reduction below 1 SM NA. Rwy 28 Straight-in and Circling
A NA minimums NA at night. When local altimeter setting not received, use Charleston altimeter
 setting and increase all MDA's 80 feet, LP and LNAV Cats C and D visibility $\frac{1}{8}$ SM and
 Circling Cats C and D visibility $\frac{1}{4}$ SM. *1780 when using Charleston altimeter setting.

MISSED APPROACH:
Climb to 3500 direct
WILHI and hold.

AWOS-3 118.575	CHARLESTON APP CON 124.1 269.125	UNICOM 122.725 (CTAF) 0
--------------------------	--	-----------------------------------

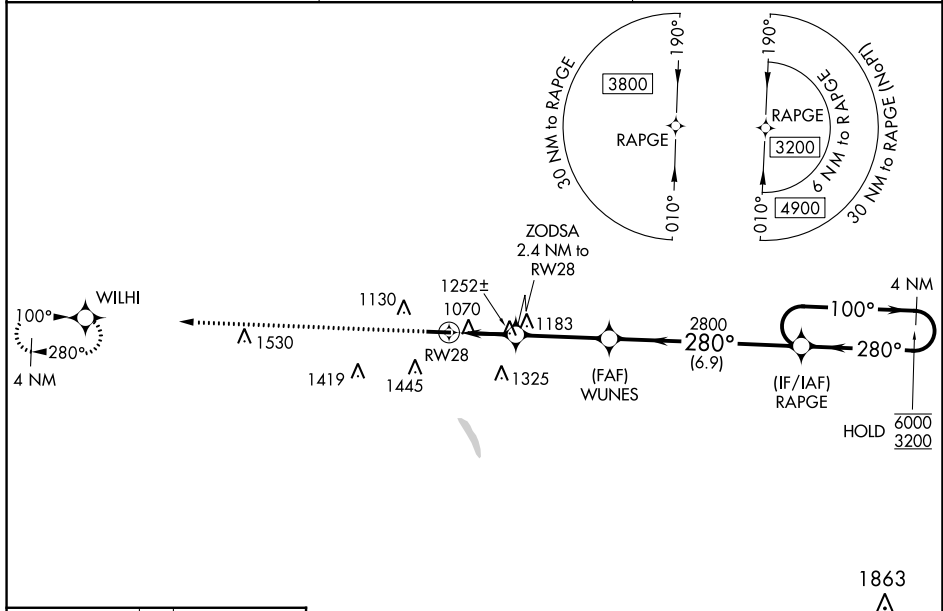

ELEV 928		TDZE 928
----------	--	----------

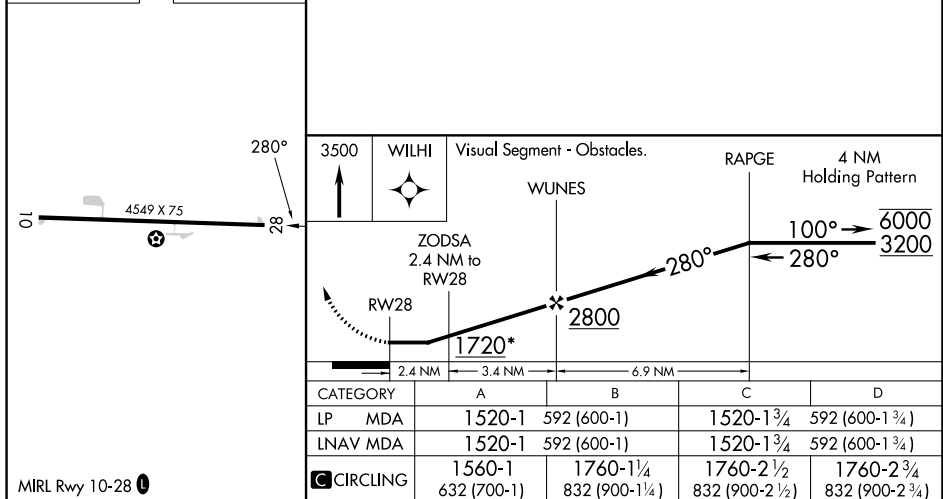

RNAV (GPS) RWY 28