

APP CRS
011°

Rwy Idg
TDZE
Apt Elev

5000
65
65

RNAV (GPS) RWY 1


INVERNESS (INF')

When local altimeter setting not received, use Ocala altimeter setting and increase all MDA 60 feet; and increase LNAV Cat C visibility 1/8 mile and Circling Cat C visibility 1/4 mile.

DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. Procedure NA at night.

MISSED APPROACH: Climb to 2000 direct GIOVA and on track 050° to VANNI and hold.

AWOS-3 119.975	JACKSONVILLE APP CON 118.6 251.15	UNICOM 122.725 (CTAF) 0
-------------------	--------------------------------------	----------------------------

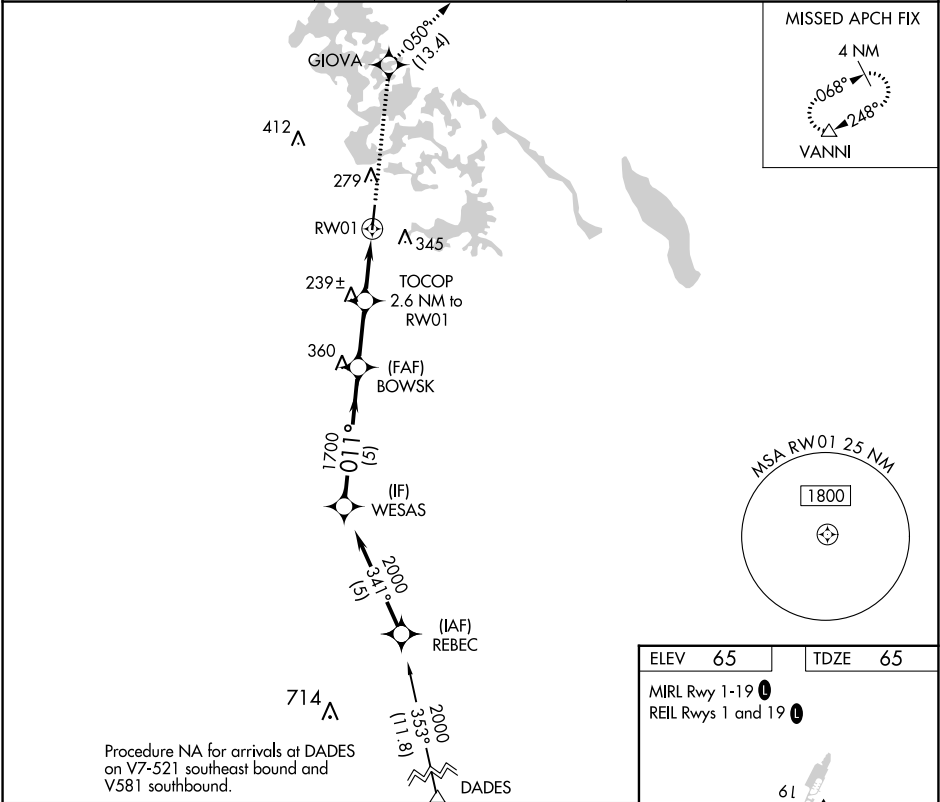

ELEV 65 TDZE 65

MIRL Rwy 1-19 0

REIL Rwys 1 and 19 0

61

5000 X 75

0.5% UP

011° to RW01

	WESAS	2000	BOWSK	2000	GIOVA	tr 050°	VANNI
		011°	3.00° TCH 47	2.6 NM to RW01			
		1700	940				
		5 NM	2.4 NM	2.6 NM			
CATEGORY	A	B	C	D			
LNAV MDA	500-1	435 (500-1)	500-1 1/4 435 (500-1 1/4)	NA			
CIRCLING	660-1	595 (600-1)	660-1 1/2 595 (600-1 1/2)	NA			