

WAAS CH 42538 W31A	APP CRS 313°	Rwy Idg 5701 TDZE 2965 Apt Elev 2965
--	------------------------	---

RNAV (GPS) RWY 31

BOWMAN RGNL (BWW)


⚠

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Hettinger altimeter setting and increase all DA 102 feet, and all MDA 120 feet; increase LPV and LNAV/VNAV visibility ¼ mile all Cats, increase LNAV Cat C visibility ¼ mile. Baro-VNAV and VDP NA when using Hettinger altimeter setting.

MISSED APPROACH:
Climb to 3500 then
descending right turn to
6000 direct HAYNI
and hold.

AWOS-3PT 118.075	SALT LAKE CITY CENTER 126.85 305.2	UNICOM 122.8 (CTAF)
----------------------------	--	-------------------------------

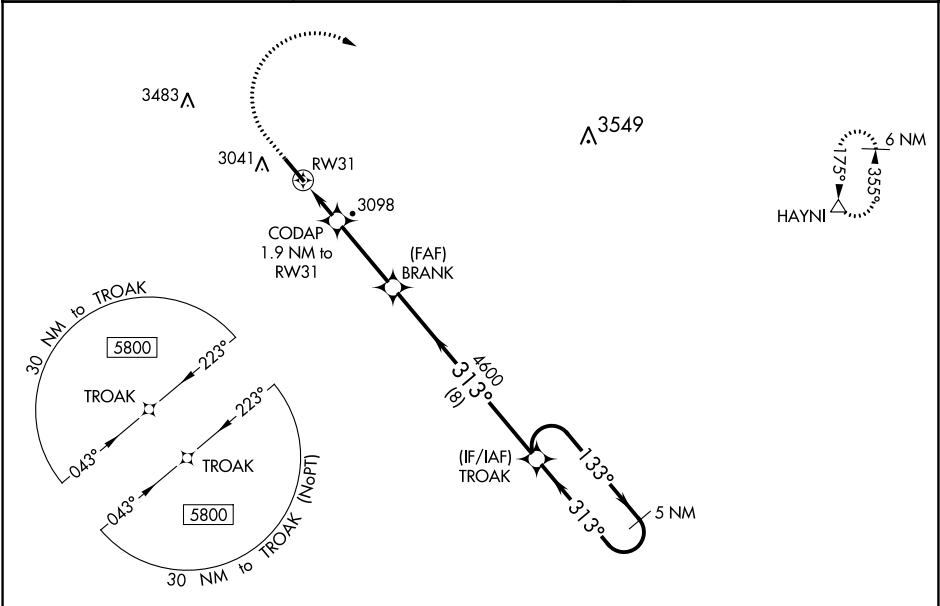

ELEV 2965

TDZE 2965

REIL Rwys 13 and 31

MIRL Rwy 13-31

	*LNAV only	CODAP 1.9 NM to RW31	BRANK	TROAK
		*1.1 NM to RW31	4600	5 NM Holding Pattern
			313°	133° → ← 313° 5800
			*3600	GP 3.00° TCH 40
			4600	
			1.1 NM	0.8 NM
			3.1 NM	8 NM
CATEGORY	A	B	C	D
LPV DA	3215-1		250 (300-1)	
LNAV/VNAV DA	3227-1		262 (300-1)	
LNAV MDA	3360-1	395 (400-1)		3360-1½ 395 (400-1½)
CIRCLING	3380-1 415 (500-1)	3420-1 455 (500-1)	3580-1¾ 615 (700-1¾)	3580-2 615 (700-2)