

MUSCATINE, IOWA

AL-5564 (FAA)

24081


WAAS CH 53701 W06A	APP CRS 059°	Rwy Idg 5500 TDZE 547 Apt Elev 547
--	------------------------	---

RNAV (GPS) RWY 6
MUSCATINE MUNI (MUT)

▼ DME/DME RNP-0.3 NA. Visibility reductions by helicopters NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 48°C (118°F). If local altimeter setting not received, use Iowa City Muni altimeter setting and increase all DAs/MDAs 80 feet. Baro-VNAV and VDP NA when using Iowa City Muni altimeter setting.

MISSED APPROACH: Climb to 3000 direct EDAGE and hold.

AWOS-3P 120.625	QUAD CITY APP CON ★ 133.275 257.8	CLNC DEL 119.125	UNICOM 122.7 (CTAF) 0
---------------------------	---	----------------------------	---------------------------------

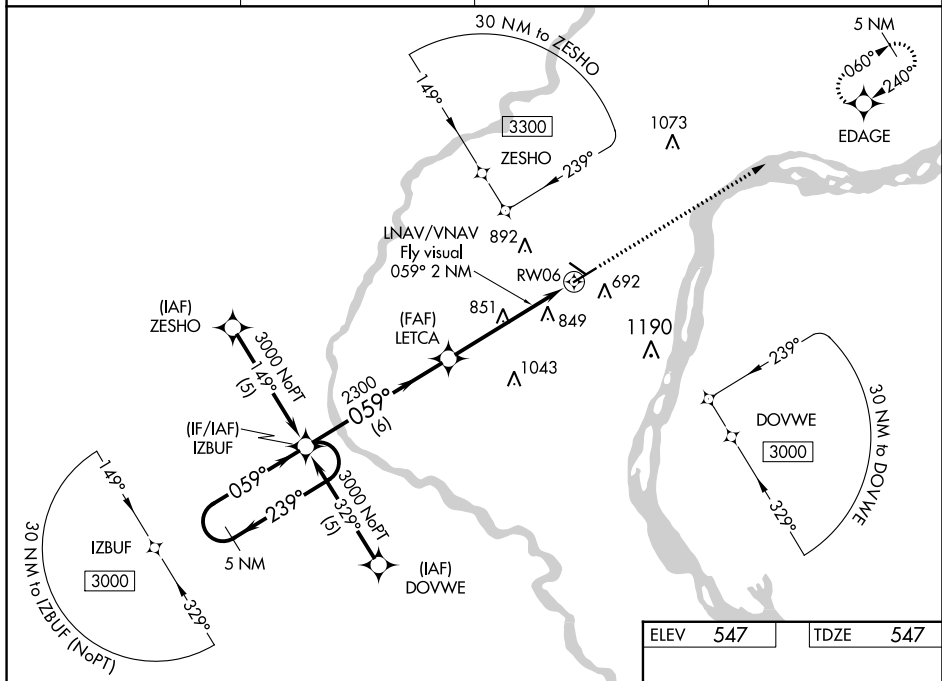

NC-3, 18 APR 2024 to 16 MAY 2024

5 NM Holding Pattern

IZBUF

LETCA

3000

239°

059°

GP 3.00° TCH 45

2300

059°

*1.7 NM to RW06

*LNAV only

RW06

3000

EDGE

LNAV/VNAV Fly visual 059° 2 NM

CATEGORY	A	B	C	D
LPV DA	1076-2 529 (600-2)			
LNAV/VNAV DA	1232-2 685 (700-2)			1232-2 1/4 685 (700-2 1/4)
LNAV MDA	1120-1 573 (600-1)		1120-1 1/2 573 (600-1 1/2)	1120-1 3/4 573 (600-1 3/4)
CIRCLING	1120-2 1/2 573 (600-2 1/2)	1200-2 1/2 653 (700-2 1/2)		1500-3 953 (1000-3)

REIL Rwy 6, 12, and 30

MIRL Rwy 6-24 and 12-30

MUSCATINE, IOWA

Orig-A 21APR22

41°22'N-91°09'W

MUSCATINE MUNI (MUT)

RNAV (GPS) RWY 6

NC-3, 18 APR 2024 to 16 MAY 2024