


WAAS CH 70399 W13A	APP CRS 132°	Rwy Idg TDZE Apt Elev	7700 1702 1716
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 13


MINOT INTL (MOT)

RNP APCH.	MISSED APPROACH: Climb to 4000 direct HEKTA and hold.
▼ ▲	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C.

ASOS 118.725	MINOT APP CON * 119.6 363.8	MAGIC CITY TOWER * 118.2 (CTAF) 0 251.125	GND CON 121.9	UNICOM 122.95
------------------------	---------------------------------------	---	-------------------------	-------------------------

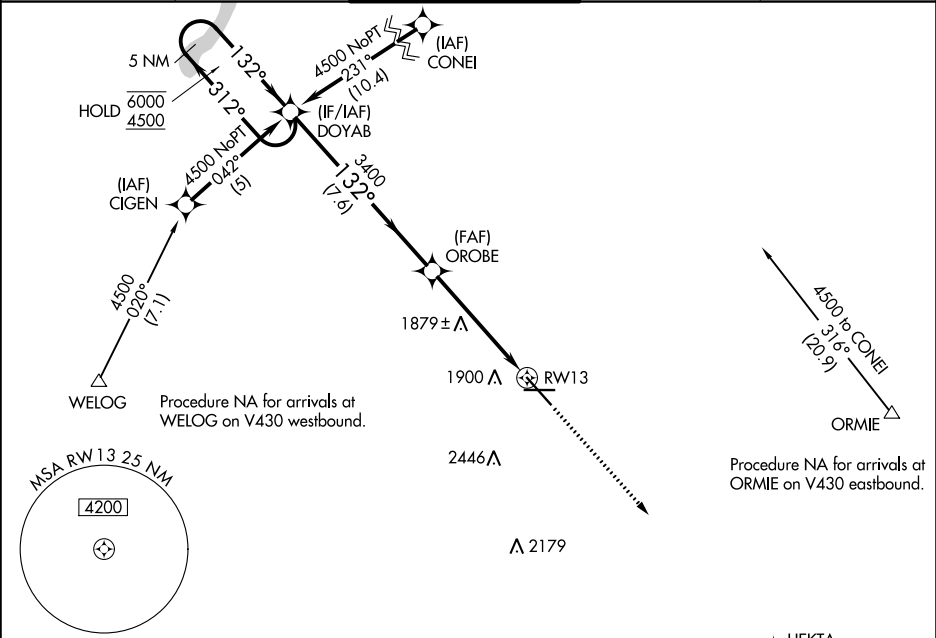

ELEV 1716	D	TDZE 1702
-----------	---	-----------

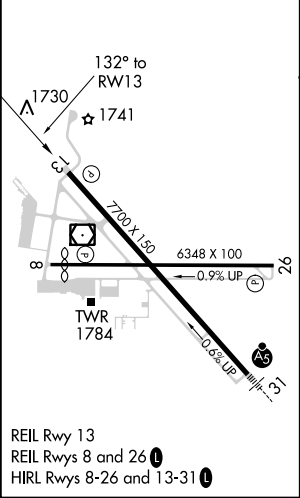

3149 5 NM Holding Pattern DOYAB				4000 HEKTA
6000 4500 312° 132° 732° 3400 3400 *1.2 NM to RWY 13 *LNAV only.				RWY 13
GP 3.00° TCH 49				
7.6 NM 3.9 NM 1.2				
CATEGORY	A	B	C	D
LPV DA	2021-1 319 (400-1)			
LNAV/VNAV DA	2181-1 3/4 479 (500-1 3/4)			
LNAV MDA	2140-1 438 (500-1)	2140-1 1/4 438 (500-1 1/4)	2140-1 1/2 438 (500-1 1/2)	
CIRCLING	2200-1 484 (500-1)	2240-1 524 (600-1)	2800-3 1084 (1100-3)	