

WAAS CH 40408 W17A	APP CRS 165°	Rwy Idg 5002 TDZE 607 Apt Elev 610
--	------------------------	---


RNAV (GPS) RWY 17
ROBERT SIBLEY (SZY)

RNP APCH - GPS.

▼ Baro-VNAV NA when using Mc Kellar-Sipes Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. Helicopter visibility reduction below 1 SM not authorized. When local altimeter setting not received, use Mc Kellar-Sipes Rgnl altimeter setting: increase LPV DA to 959 and all visibilities $\frac{1}{4}$ SM, increase LNAV/VNAV DA to 1153 and all visibilities $\frac{1}{4}$ SM; increase all MDAs 100 feet and LNAV visibility Cat C and Circling visibility Cat D $\frac{1}{4}$ SM, and LNAV visibility Cat D $\frac{1}{2}$ SM. Straight-in RWY 17 NA at night, Circling RWY 17, 35 NA at night.

MISSED APPROACH:
Climb to 2600 direct
ZABAB and hold.

AWOS-3 118.425	MEMPHIS CENTER 124.35 318.1	UNICOM 122.7 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

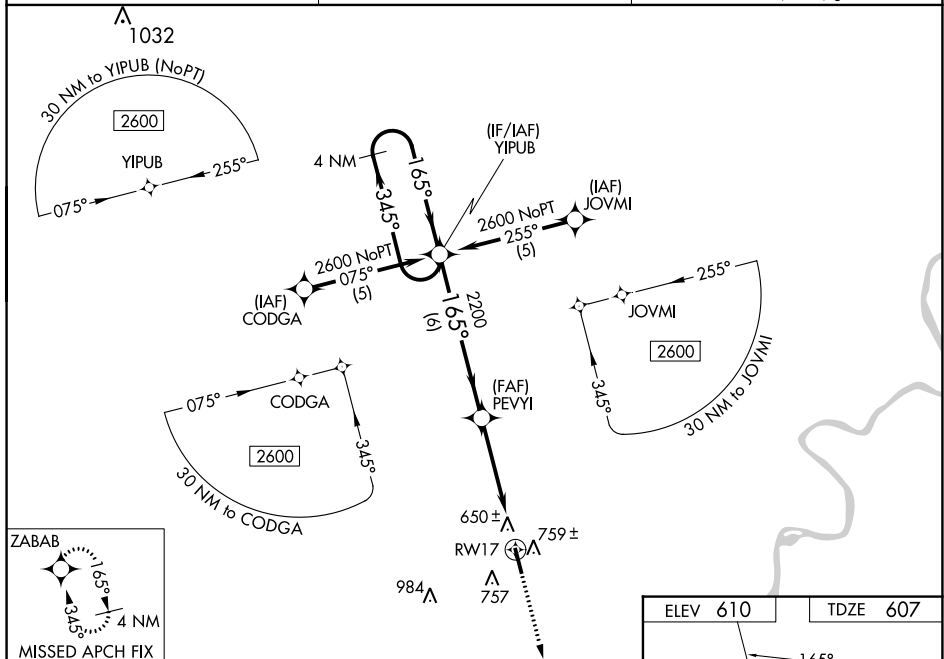

4 NM Holding Pattern

YIPUB

VEGY

RW17

GP 3.00° TCH 30

2600

345°

165°

165°

2200

6 NM


4.9 NM

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 29°)

2600

ZABAB

CATEGORY	A	B	C	D
LPV DA	861-1	254 (300-1)		
RNAV/DA	1055-1 $\frac{3}{4}$	448 (500-1 $\frac{3}{4}$)		
RNAV MDA	1020-1	413 (500-1)	1020-1 $\frac{1}{4}$	413 (500-1 $\frac{1}{4}$)
CIRCLING	1060-1 450 (500-1)	1080-1 470 (500-1)	1080-1 $\frac{1}{2}$ 470 (500-1 $\frac{1}{2}$)	1300-2 $\frac{1}{4}$ 690 (700-2 $\frac{1}{4}$)

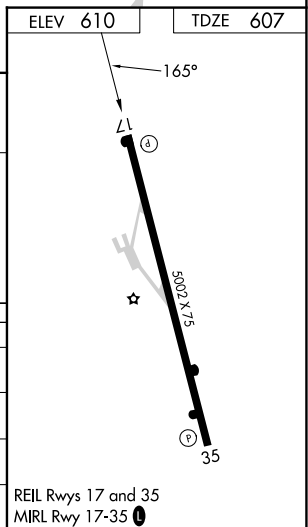

SE-1, 16 MAY 2024 to 13 JUN 2024

SE-1, 16 MAY 2024 to 13 JUN 2024