


WAAS CH 72630 W11A	APP CRS 111°	Rwy Idg TDZE 1152 Apt Elev 1171	5001
--	------------------------	---	-------------

RNAV (GPS) RWY 11
IOWA COUNTY (MRJ)

⚠ Baro-VNAV NA when using Platteville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). When local altimeter setting not received, use Platteville altimeter setting and increase all DA 55 feet, increase LPV and LNAV/VNAV all Cats visibility 1/8 mile, increase all MDA 60 feet, and LNAV Cat C visibility 1/4 mile. DME/DME RNP-0.3 NA.

MISSED APPROACH:
Climb to 3600 direct YECNU and hold.

AWOS-3 118.525	CHICAGO CENTER 133.95 281.4	UNICOM 122.8 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

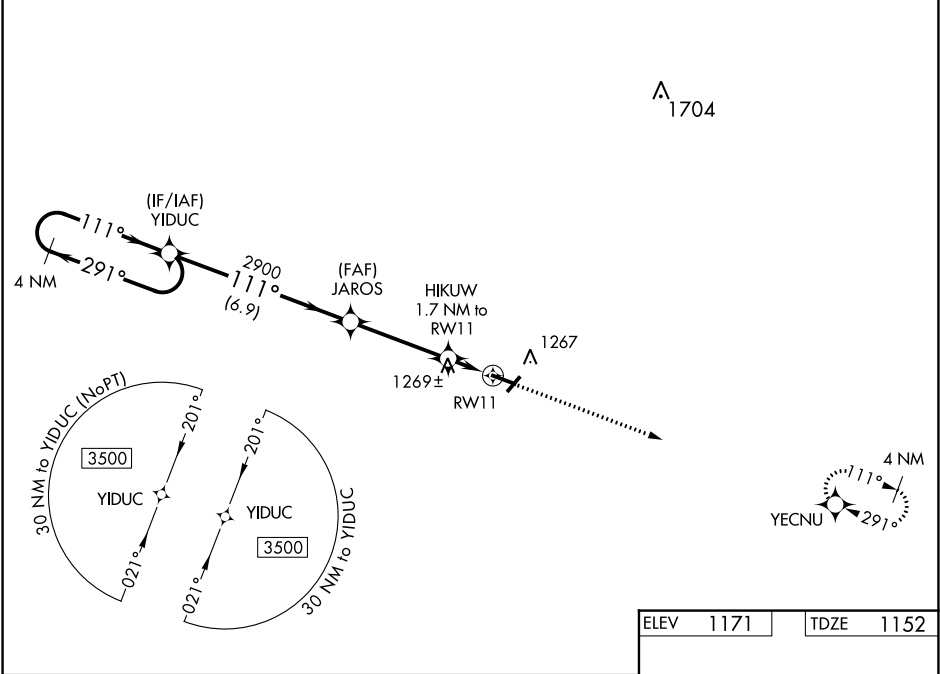

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 43).		3600	YECNU
YIDUC		JAROS	HIKUW	* LNAV only	
3500 ← 291°		2900	1.7 NM to RW11	* 1 NM to RW11	
GP 3.00° TCH 40		2900	368 (400-1 1/8)	RW11	
		6.9 NM	3.7 NM	0.7 NM	
CATEGORY	A	B	C	D	
LPV DA	1352-3/4		200 (200-3/4)	NA	
LNAV/VNAV DA	1402-7/8		250 (300-7/8)	NA	
LNAV MDA	1520-1	368 (400-1)	1520-1 1/8	NA	
CIRCLING	1620-1	1640-1	1640-1 1/2	NA	
	449 (500-1)	469 (500-1)	469 (500-1 1/2)		

