

WAAS
CH **60924**
W04B

APP CRS
039°

Rwy Idg **8810**
TDZE **11**
Apt Elev **17**

RNAV (GPS) Y RWY 4R


NEWARK LIBERTY INTL (EWR)

RNP APCH - GPS.
RADAR required.
⚠ When Circling to Rwy 29 at night, operational VGSI required, remain on or above VGSI glidepath until threshold.

ALSF-2
ⓐ

MISSED APPROACH: (Do not exceed 210K until NEBTE) Climb to 550 then climbing right turn to 2000 direct TYNIE and left turn on track 015° to NEBTE, cross NEBTE at or below 2000 then climbing left turn to 3000 on track 313° to FLYRS and hold, continue climb-in-hold to 3000.

D-ATIS	NEW YORK APP CON	NEWARK TOWER	GND CON	CLNC DEL	CPDLC
115.7 134.825	128.55 379.9	118.3 257.6	121.8	118.85	

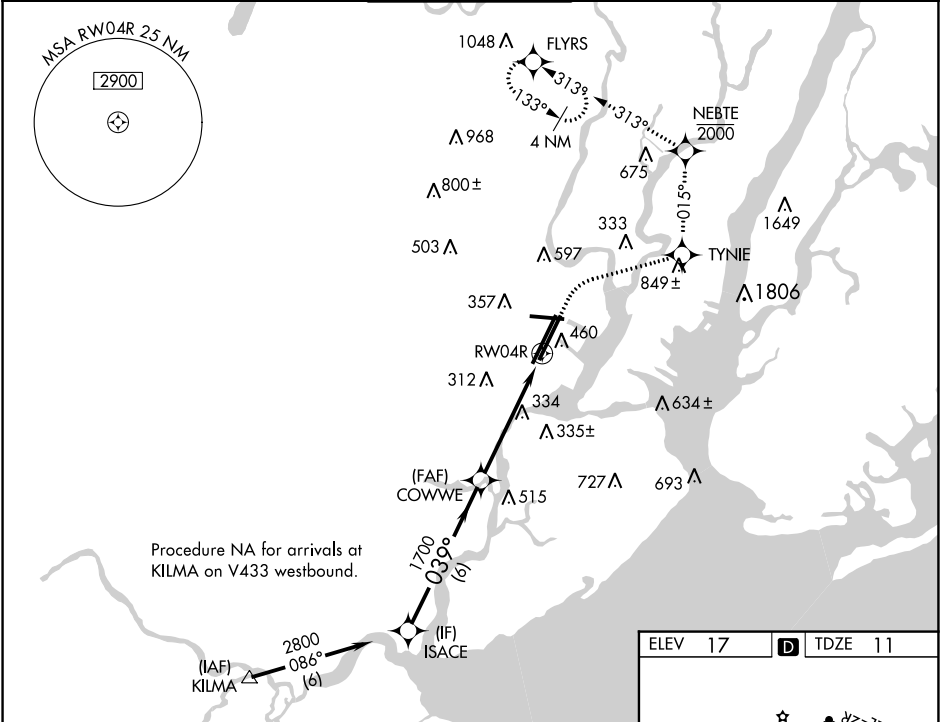

550

2000

TYNIE

NEBTE

3000

FLYRS

ISACE

COWWE

RW04R

VGSI and RNAV glidepath not coincident (VGSI Angle 2.95/TCH 71).

2800 039°

1700

1700

1.7 NM to RW04R

6 NM

3.4 NM

1.7

GP 3.04° TCH 55

CATEGORY	A	B	C	D
LPV DA	211/18 200 (200-½)			
LNAV MDA	600/24 589 (600-½)		600-1¼ 589 (600-1¼)	
CIRCLING	760-1	743 (800-1)	900-2¾ 883 (900-2¾)	900-3 883 (900-3)

ELEV 17 D TDZE 11

TDZ/CL All Rwy's
REIL Rwy's 11, 22R and 29
HIRL All Rwy's