

LOC/DME I-CBF

111.35

Chan 50 (Y)

APP CRS

357°

Rwy Idg

5500

TDZE

1245

Apt Elev

1245



ILS or LOC RWY 36

COUNCIL BLUFFS MUNI (CBF)

VDP NA with Eppley Airfield altimeter setting. When local altimeter setting not received, use Eppley Airfield altimeter setting and increase S-ILS 36 DA to 1498 feet, and all MDA 60 feet and increase S-LOC 36 Cats C and D and Circling Cat C and D visibility ¼ SM. HODIN fix minimums: increase Circling Cat C and D visibility ¼ SM.

MISSED APPROACH: Climb to 3000 then right turn direct OVR VORTAC and hold.

AWOS-3 126.575	OMAHA APP CON 124.5 263.0	CLNC DEL 127.675	UNICOM 122.725 (CTAF) 1
-------------------	------------------------------	---------------------	----------------------------

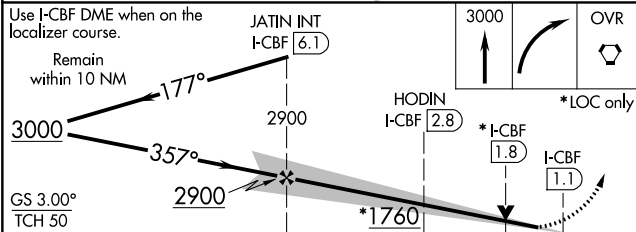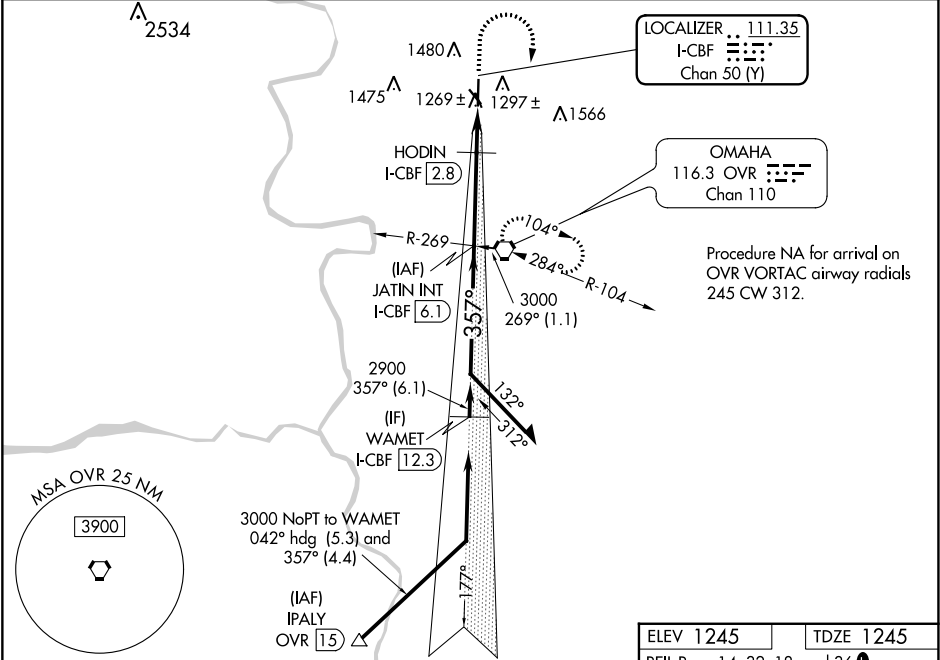

CATEGORY	A	B	C	D
S-ILS 36		1445-¾	200 (200-¾)	
S-LOC 36	1760-1	515 (600-1)	1760-1⅓	515 (600-1⅓)
CIRCLING	1780-1 535 (600-1)	1840-1 595 (600-1)	1840-1½ 595 (600-1½)	1880-2 635 (700-2)
HODIN FIX MINIMUMS				
S-LOC 36		1520-1	275 (300-1)	
CIRCLING	1780-1 535 (600-1)	1840-1 595 (600-1)	1840-1½ 595 (600-1½)	1880-2 635 (700-2)

