

WAAS CH 93900 W35A	APP CRS 353°	Rwy Idg TDZE 650 Apt Elev 658
--	------------------------	---

RNAV (GPS) RWY 35

NEW BRAUNFELS NTL (BAZ)

RNP APCH.



▼

⚠

When local altimeter setting not received, use San Marcos Rgnl altimeter setting; increase LPV DA to 972 feet, LNAV/VNAV DA to 1153 feet; increase all MDAs 60 feet and visibility LNAV Cat C and D ¼ SM. Baro-VNAV and VDP NA when using San Marcos Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F).

MISSED APPROACH: Climb to 3100 direct FONEK and via 340° track to BRAUN and hold, continue climb-in-hold to 3100.

ATIS 119.325	SAN ANTONIO APP CON 124.45 335.625	NEW BRAUNFELS TOWER★ 127.05 (CTAF) 285.4	GND CON 120.175	CLNC DEL 134.75	CLNC DEL 134.75 (When twr closed)	UNICOM 122.7
------------------------	--	--	---------------------------	---------------------------	--	------------------------

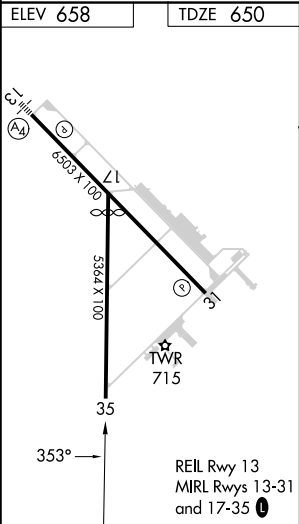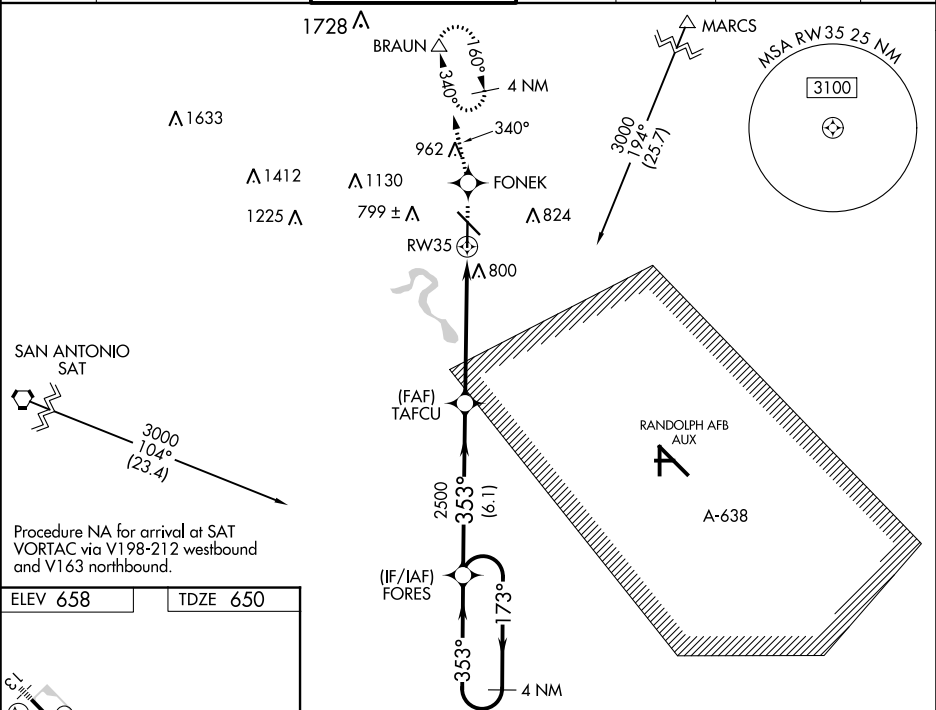

4 NM Holding Pattern			FORES	3100 ↑	FONEK ✱	tr 340° ↻	BRAUN △
3000 ←173° →353°			353°	TAFCU ✱	*1.4 NM to RW35 RW35		
GP 3.00° TCH 45			2500	*LNAV only.			
			6.1 NM	4.2 NM	1.4 NM		
CATEGORY	A		B	C		D	
LPV DA			929-1	279 (300-1)			
LNAV/VNAV DA			1110-1¾	460 (500-1¾)			
LNAV MDA	1140-1	490 (500-1)	1140-1¾ 490 (500-1¾)		1140-1½ 490 (500-1½)		