BITEZ ONE DEPARTURE (RNAV)

(BITEZ1.BITEZ) 29OCT26

ST PAUL, MINNESOTA


ST PAUL DOWNTOWN HOLMAN FLD (STP)

TOP ALTITUDE: ASSIGNED BY ATC

RNAV 1 - DME/DME/IRU or GPS.
RADAR required.

MINNEAPOLIS DEP CON
121.2 335.65
ATIS
118.35
CLNC DEL
121.675
GND CON
121.675
ST PAUL TOWER★
119.1 257.8

TAKEOFF MINIMUMS
Rwy 31: NA - Airport restrictions.
Rwy 9: 400-2 with minimum climb of 280'/NM to 1500 or standard with minimum climb of 310'/NM to 1400.
Rwy 13: Standard with minimum climb of 270'/NM to 1500.
Rwy 14: Standard with minimum climb of 220'/NM to 2500.
Rwy 27: Standard with minimum climb of 380'/NM to 1000.
Rwy 32: Standard with minimum climb of 350'/NM to 2500.

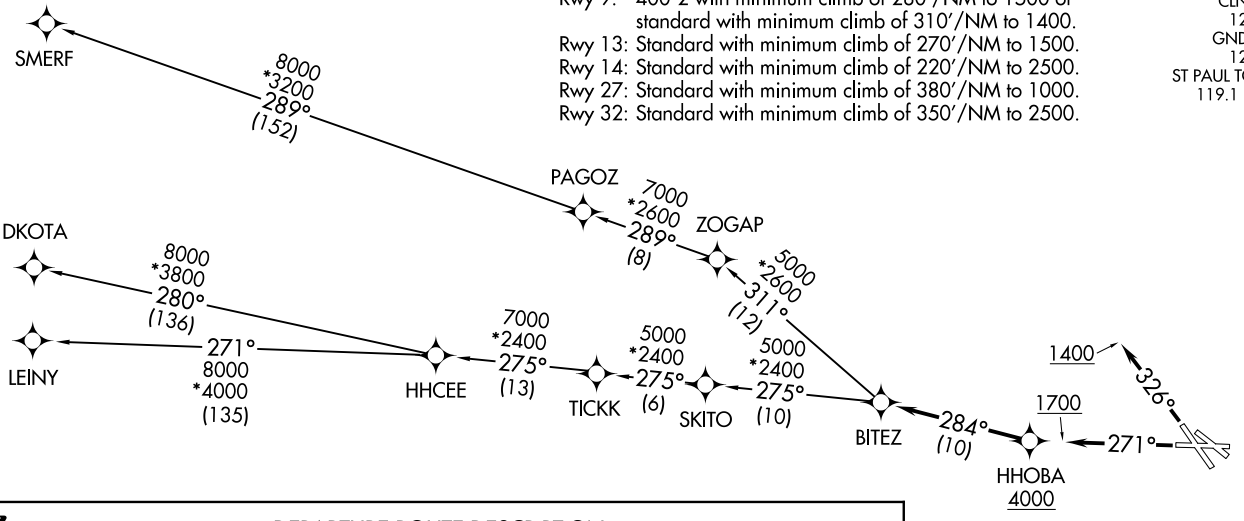


DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 9, 13, 14: Climb on assigned heading for vectors to HHOBA, thence. . .
TAKEOFF RUNWAY 27: Climb on heading 271° to 1700 for vectors to HHOBA, thence. . .
TAKEOFF RUNWAY 32: Climb on heading 326° to 1400 for vectors to HHOBA, thence. . .

. . .cross HHOBA at or above 4000, then on track 284° to BITEZ, then on transition.
Maintain ATC assigned altitude. Expect filed altitude 10 minutes after departure.

DKOTA TRANSITION (BITEZ1.DKOTA)
LEINY TRANSITION (BITEZ1.LEINY)
SMERF TRANSITION (BITEZ1.SMERF)



NOTE: Chart not to scale.

(BITEZ1.BITEZ) 26302
BITEZ ONE DEPARTURE (RNAV)
AL-263 (FAA)
ST PAUL DOWNTOWN HOLMAN FLD (STP)
ST PAUL, MINNESOTA