


WAAS CH 93819 W18A	APP CRS 177°	Rwy Idg 9503 TDZE 23 Apt Elev 25
--	------------------------	---

RNAV (GPS) RWY 18

MYRTLE BEACH INTL (MYR)


RNP APCH - GPS

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LPV Cat E visibility to RVR 4000, increase LNAV/VNAV Cat E visibility to 1½ mile and increase LNAV/Cats C, D and E visibility to RVR 6000.
*RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR 



MISSED APPROACH: Climb to 500 then climbing right turn to 3000 direct PLANN and hold, continue climb-in-hold to 3000.

ATIS 123.925	MYRTLE BEACH APP CON * (171° - 321°) 127.4 257.95 (322° - 170°) 119.2 350.3	MYRTLE BEACH TOWER * 128.45 (CTAF) 0 259.3	GND CON 120.3 275.8	CLNC DEL 120.3	UNICOM 122.95
------------------------	---	---	-------------------------------	--------------------------	-------------------------

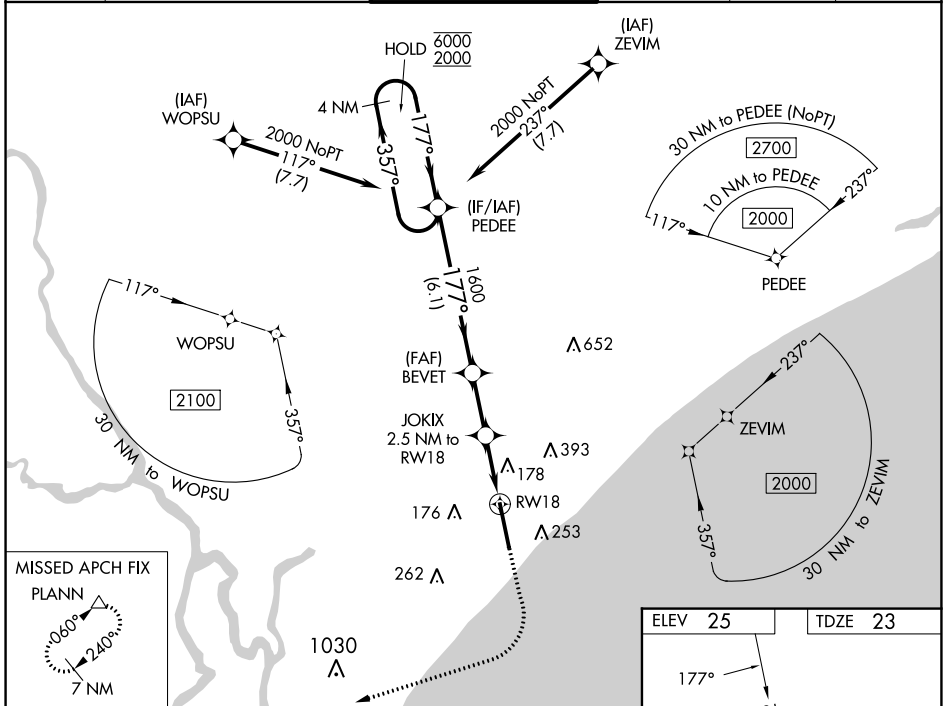

SE-2, 03 OCT 2024 to 31 OCT 2024

SE-2, 03 OCT 2024 to 31 OCT 2024

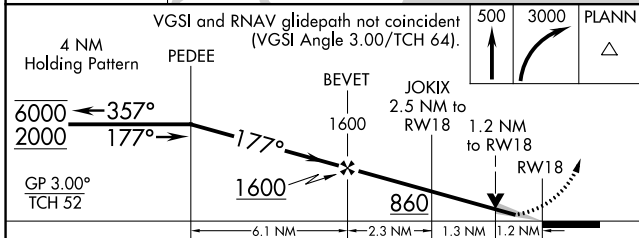

CATEGORY	A	B	C	D	E
LPV DA*		223/24	200 (200-½)		
LNAV/VNAV DA		465/50	442 (500-1)		
LNAV MDA	440/24	417 (500-½)	440/40	417 (500-¾)	
CIRCLING	560-1	535 (600-1)	700-2 675 (700-2)	700-2¼ 675 (700-2¼)	700-2½ 675 (700-2½)

