


APP CRS	Rwy Idg	11500
191°	TDZE	302
	Apt Elev	312

RNAV (RNP) Z RWY 19L


WASHINGTON DULLES INTL (IAD)

RNP AR APCH - GPS.	ALSF-2	MISSED APPROACH: Climb to 800 then climbing left turn to 3000 direct ASPER and hold.
▼ For uncompensated Baro-VNAV systems, procedure NA below -13°C or above 54°C. Simultaneous approach authorized. For inop ALS, increase RNP 0.11 all Cats visibility to RVR 4500.		

POTOMAC APP CON	DULLES TOWER	GND CON	CLNC DEL
120.45 306.925 (241°-330°)	120.1 317.8 (Rwys 1R/19L)	121.9 317.8 (EAST)	135.7 317.8
128.525 306.925 (091°-240°)	120.25 348.6 (Rwys 1C/19C)	121.625 348.6 (WEST)	
126.1 338.25 (331°-090°)	134.425 348.6 (Rwys 1L/19R and 12/30)		

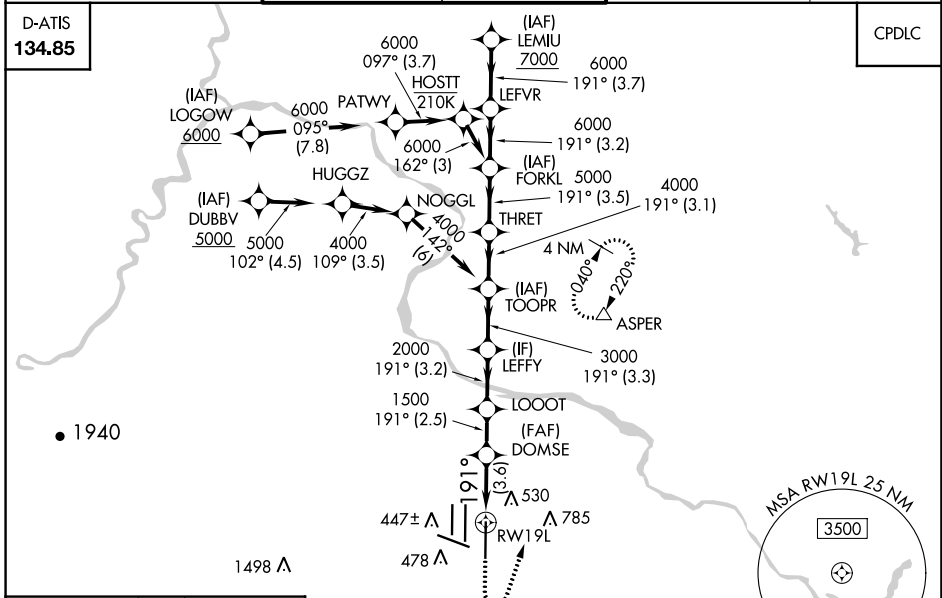

ELEV 312	TDZE 302
----------	----------



TDZ/CL Rwys 1C, 1L, 1R, 12, 19C and 19R	TWR 640
REIL Rwy 30	
HIRL All Rwys	

CATEGORY	A	B	C	D
RNP 0.11 DA		620/24	318 (400-½)	
RNP 0.15 DA		684/35	382 (400-¾)	
RNP 0.30 DA		730/40	428 (500-¾)	

AUTHORIZATION REQUIRED

NE-3, 03 OCT 2024 to 31 OCT 2024

NE-3, 03 OCT 2024 to 31 OCT 2024