




| | | | |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|
| WAAS CH 72707 W02A | APP CRS 023° | Rwy Idg TDZE Apt Elev | 5197 826 827 |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|

RNAV (GPS) RWY 2
JOHN F. KENNEDY MEMORIAL (ASX)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -28°C (-18°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using Ironwood altimeter setting. When local altimeter setting not received, use Ironwood altimeter setting and increase all DAs 132 feet and all MDAs 140 feet; increase LPV all Cats and LNAV Cat C/D visibility ¾ mile, LNAV/VNAV all Cats and Circling Cat C/D visibility ½ mile.

MISSED APPROACH:
Climb to 3200 direct HOSUT and hold.

| | | | |
|------------------------|-------------------------------------------|----------------------|----------------------------------------|
| ASOS 126.775 | MINNEAPOLIS CENTER 126.45 276.4 | GCO 122.25 | UNICOM 122.8 (CTAF) 0 |
|------------------------|-------------------------------------------|----------------------|----------------------------------------|

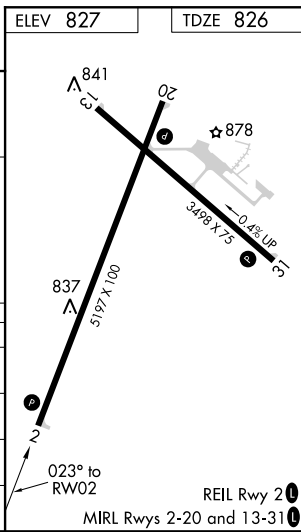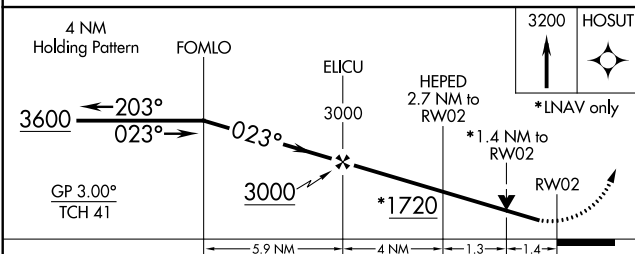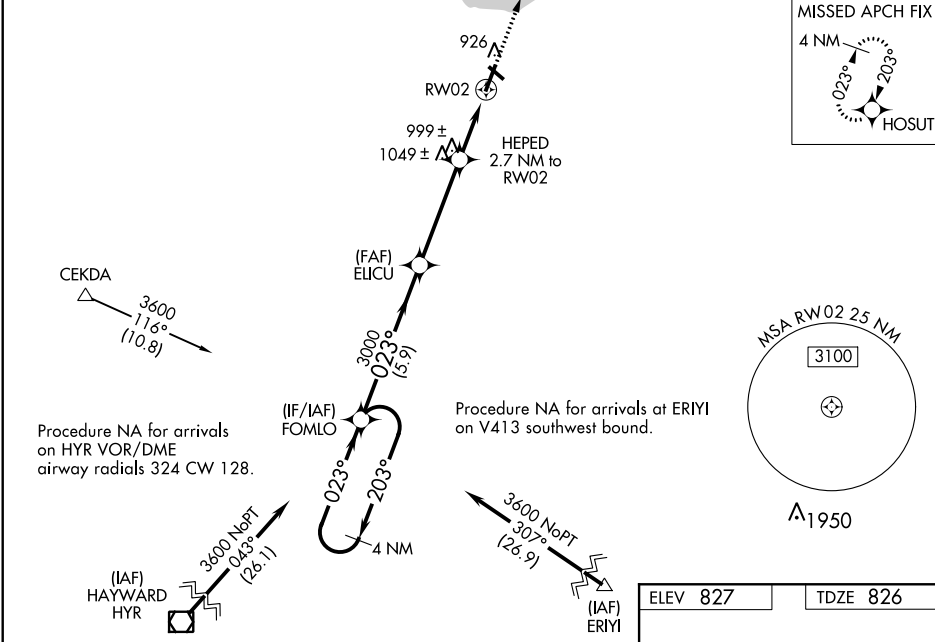

| CATEGORY | A | B | C | D |
|-------------------|--------|-------------|-------------------------------|-------------------------------|
| LPV DA | | 1076-7/8 | 250 (300-7/8) | |
| LNAV/VNAV DA | | 1103-7/8 | 277 (300-7/8) | |
| LNAV MDA | 1300-1 | 474 (500-1) | 1300-1 3/8 | 474 (500-1 3/8) |
| C CIRCLING | 1300-1 | 473 (500-1) | 1440-1 3/4 613 (700-1 3/4) | 1560-2 1/4 733 (800-2 1/4) |

EC-3, 10 OCT 2019 to 07 NOV 2019

EC-3, 10 OCT 2019 to 07 NOV 2019