

WAAS CH 45932 W11A	APP CRS 106°	Rwy Idg TDZE Apt Elev	3602 121 121
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 11


NEW KENT COUNTY (W96)

NA

Use Richmond Intl altimeter setting. DME/DME RNP-0.3 NA.
Helicopter visibility reduction below 1 SM NA.
Procedure NA at night.

MISSED APPROACH: Climb to 2000 direct WINVO and hold.

AWOS-3 119.875	RIC ASOS 119.15 263.025	POTOMAC APP CON 126.4 282.375	UNICOM 122.8 (CTAF) 0
--------------------------	-----------------------------------	---	---------------------------------

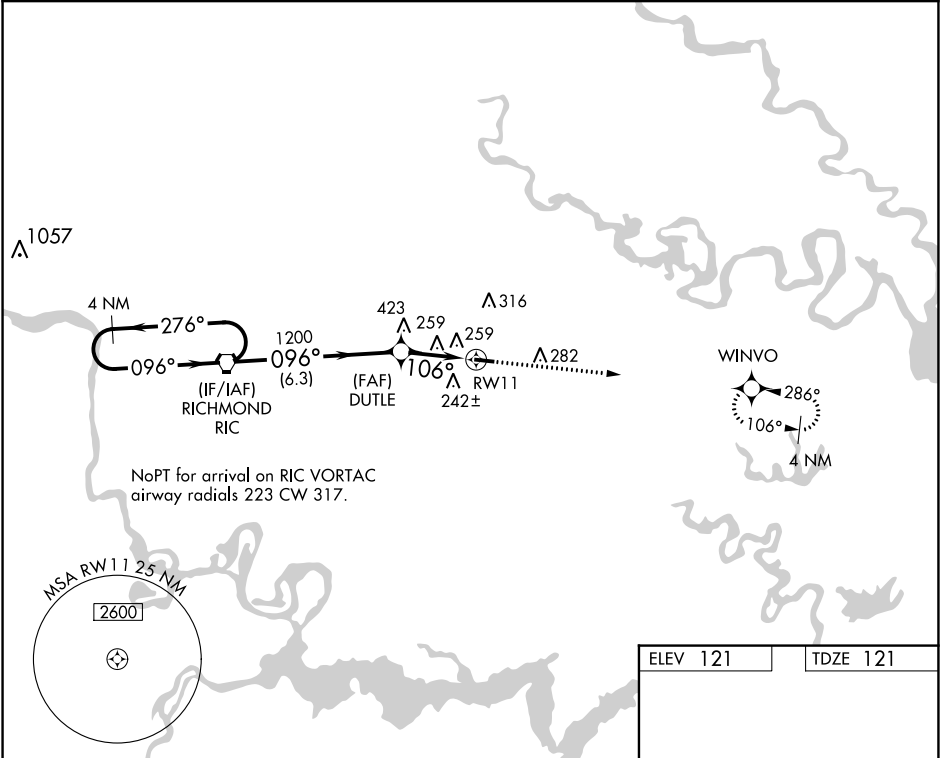

4 NM Holding Pattern

RIC VORTAC

Visual Segment - Obstacles.

2000 WINVO

2100

276°

096°

096°

DUTLE

1200

106°

RW11

6.3 NM

2.7 NM

CATEGORY	A	B	C	D
LP MDA	540-1	419 (500-1)	540-1 $\frac{1}{8}$ 419 (500-1 $\frac{1}{8}$)	NA
LNAV MDA	560-1	439 (500-1)	560-1 $\frac{1}{4}$ 439 (500-1 $\frac{1}{4}$)	NA
CIRCLING	620-1	499 (500-1)	760-1 $\frac{3}{4}$ 639 (700-1 $\frac{3}{4}$)	NA

ELEV 121

TDZE 121

106°

3603 X 75

0.4% UP

29°

MIRL Rwy 11-29 0

REIL Rws 11 and 29 0