| WAAS CH 45538 W23A | APP CRS 229° | Rwy Idg 5001 TDZE 88 Apt Elev 90 |
|---|---|---|

# RNAV (GPS) RWY 23

ZEPHYRHILLS MUNI (ZPH)

RNP APCH.

Baro-VNAV and VDP NA when using Tampa Exec altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Rwy 23 helicopter visiblity reduction below ¾ SM NA. When local altimeter setting not received, use Tampa Exec altimeter setting and increase all DA 48 feet and all MDA 60 feet. Increase LPV and LNAV/VNAV all Cats, LNAV and Circling Cat C/D visibility ¼ mile.

MISSED APPROACH: Climb to 2000 direct BRUNT and hold.

| AWOS-3PT | TAMPA APP CON | UNICOM |
|---|---|---|
| 118.975 | 119.9 290.3 | 123.075 (CTAF) L |

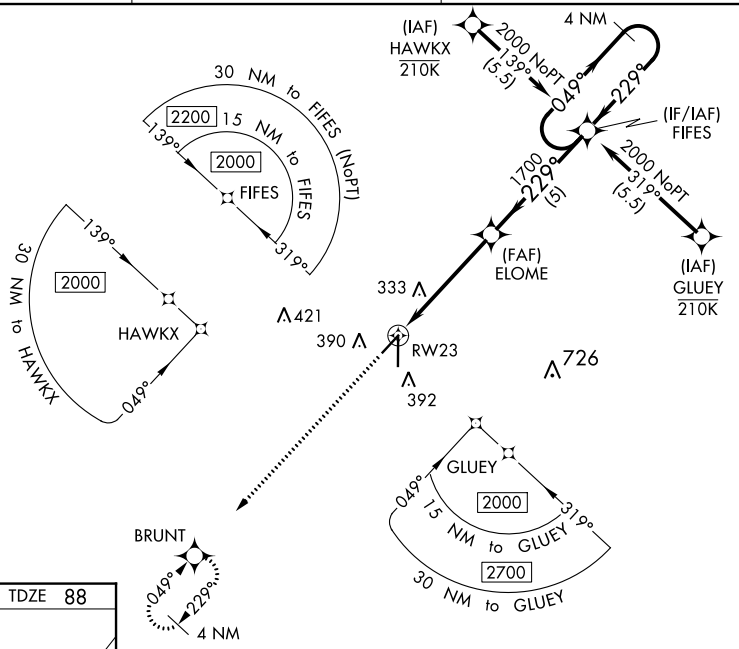


ELEV 90 TDZE 88

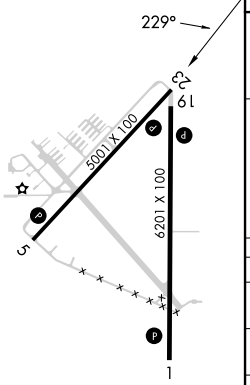


MIRL Rwy 5-23 L
HIRL Rwy 1-19 L
REIL Rwys 1 and 19 L

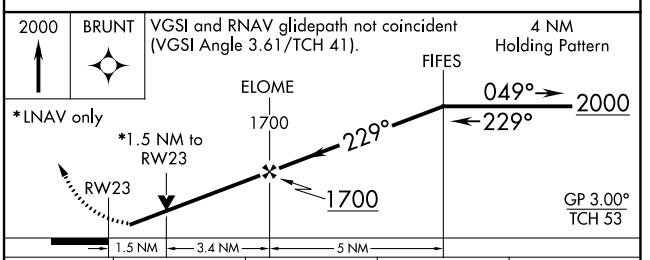


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 377-1 | 289 (300-1 ) | | |
| LNAV/VNAV DA | 409-1 | 321 (400-1) | | |
| LNAV MDA | 600-1 | 512 (600-1) | 600-1⅜ | 512 (600-1⅜) |
| C CIRCLING | 740-1 | 650 (700-1) | 740-1¾ 650 (700-1¾) | 740-2 650 (700-2) |



SE-3, 03 OCT 2024 to 31 OCT 2024
SE-3, 03 OCT 2024 to 31 OCT 2024