

WAAS CH 87037 W28A	APP CRS 276°	Rwy Idg 3463 TDZE 1013 Apt Elev 1048
--	------------------------	---

RNAV (GPS) RWY 28

GREENVILLE DOWNTOWN (GMU)

▼


Baro-VNAV NA when using Greer altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.

▲


When local altimeter setting not received, use Greer altimeter setting and increase all DA 29 feet and all MDA 40 feet; increase LNAV/VNAV all Cats and LNAV Cats C/D visibility ½ mile. Helicopter visibility reduction below 1 SM NA. Night landing: Rwy 19 NA.

MISSED APPROACH:
Climb to 3700 direct FOORT and hold.

ATIS ★ 127.075	GREER APP CON ★ 118.8 270.275	GREENVILLE TOWER ★ 119.9 (CTAF) 0 257.7	GND CON 121.25	UNICOM 122.95
--------------------------	---	---	--------------------------	-------------------------

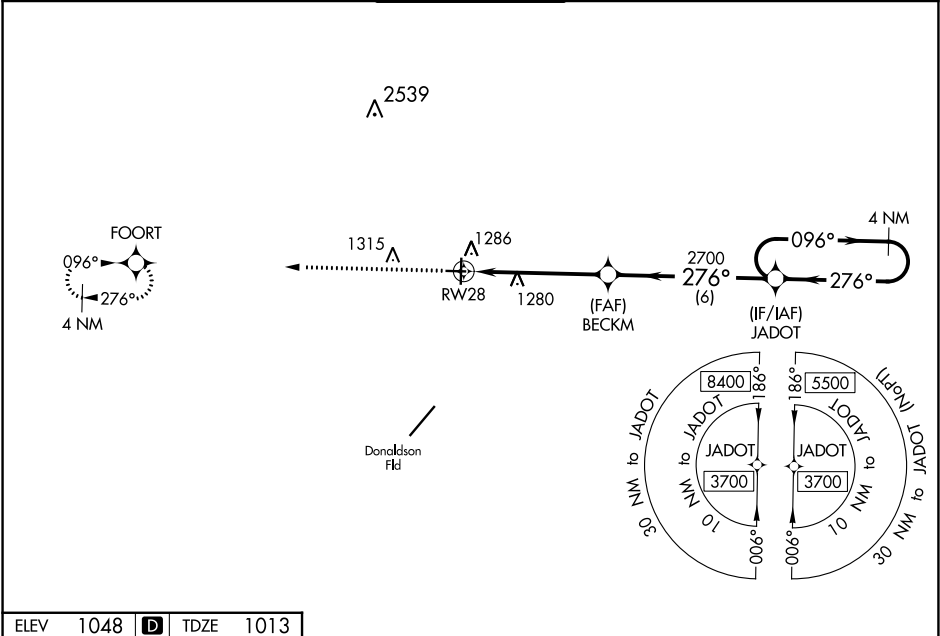

ELEV 1048	D	TDZE 1013
------------------	----------	------------------

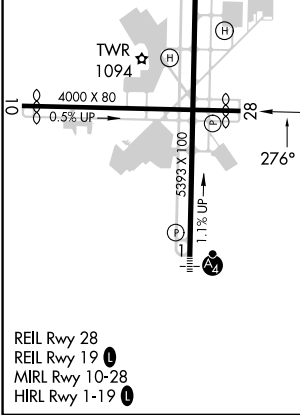

3700

FOORT

4 NM

Holding Pattern

JADOT

096°

276°

3700

BECKM

2700

2700

276°

2700

GP 3.00°

TCH 40

RW28

5.2 NM

6 NM

CATEGORY	A	B	C	D
LPV DA	1263-1 250 (300-1)			
LNAV/VNAV DA	1463-1½ 450 (500-1½)			
LNAV MDA	1540-1	527 (500-1)	1540-1½	527 (500-1½)
CIRCLING	1620-1	572 (600-1)	1780-2 732 (800-2)	1860-2¾ 812 (900-2¾)

SE-2, 18 APR 2024 to 16 MAY 2024

SE-2, 18 APR 2024 to 16 MAY 2024