


WAAS CH 60924 W04B	APP CRS 039°	Rwy Idg 8810 TDZE 11 Apt Elev 17
--	------------------------	---

RNAV (GPS) Y RWY 4R

NEWARK LIBERTY INTL (EWR)

RNP APCH - GPS.		ALSF-2 	MISSED APPROACH: (Do not exceed 210K until NEBTE) Climb to 550 then climbing right turn to 2000 direct TYNIE and left turn on track 015° to NEBTE, cross NEBTE at or below 2000 then climbing left turn to 3000 on track 313° to FLYRS and hold, continue climb-in-hold to 3000.					
RADAR required.								
 When Circling to Rwy 29 at night, operational VGSI required, remain on or above VGSI glidepath until threshold.								
D-ATIS		NEW YORK APP CON		NEWARK TOWER		GND CON	CLNC DEL	CPDLC
115.7 134.825		128.55 379.9		118.3 257.6		121.8	118.85	

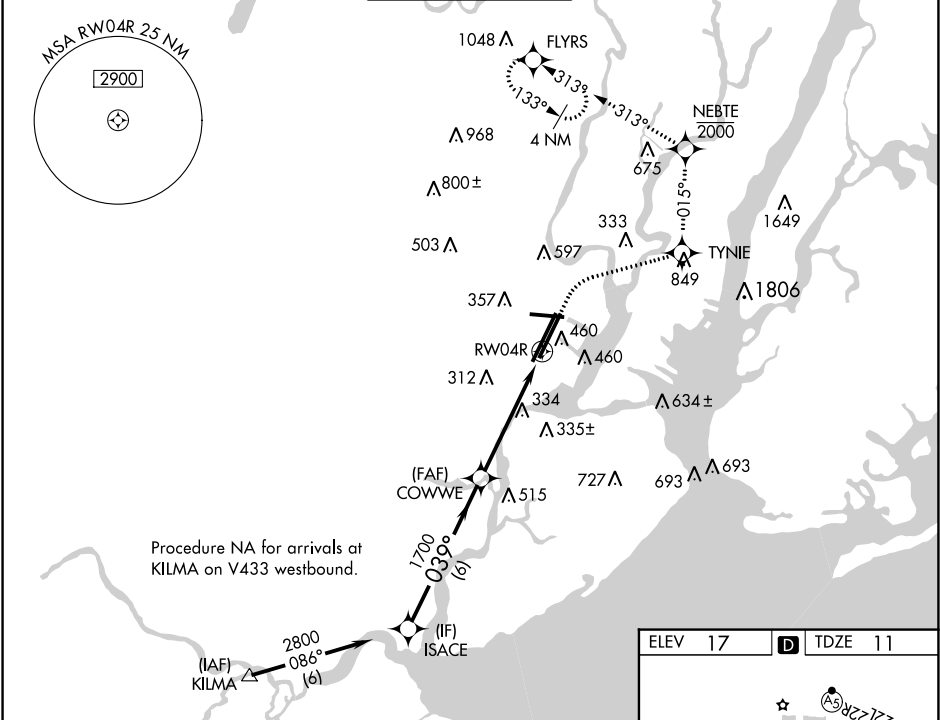

		550 ↑		2000 ↷		TYNIE ✧		tr 015° ↷		NEBTE ✧ 2000		3000 tr 313° ↷		FLYRS ✧	
		VGSI and RNAV glidepath not coincident (VGSI Angle 2.95/TCH 71°).													
		ISACE 2800 039° COWWE 1700 1700 1.7 NM to RW04R RW04R GP 3.04° TCH 55 6 NM 3.4 NM 1.7													
CATEGORY		A		B		C						D			
LPV DA		211/18 200 (200-½)													
LNAV MDA		600/24		589 (600-½)		600-1¼		589 (600-1¼)							
CIRCLING		760-1		743 (800-1)		900-2¾ 883 (900-2¾)		900-3 883 (900-3)							

