


WAAS CH 50117 W15A	APP CRS 147°	Rwy Idg TDZE 417 Apt Elev 421
--	------------------------	---


RNAV (GPS) RWY 15
SYRACUSE HANCOCK INTL (SYR)

RNP APCH.	MALS	MISSED APPROACH: Climb to 1600 then climbing left turn to 3200 direct STODA and hold, continue climb-in-hold to 3200.
▼ Rwy 15 helicopter visibility reduction below ¾ SM NA. ▲ Inop table does not apply to LPV DA all Cats. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C.	Ⓜ Ⓜ	

ATIS 124.225	SYRACUSE APP CON 126.125 269.125	SYRACUSE TOWER 120.3 239.0	GND CON 121.7 348.6	CLNC DEL 125.05 257.775
------------------------	--	--------------------------------------	-------------------------------	-----------------------------------

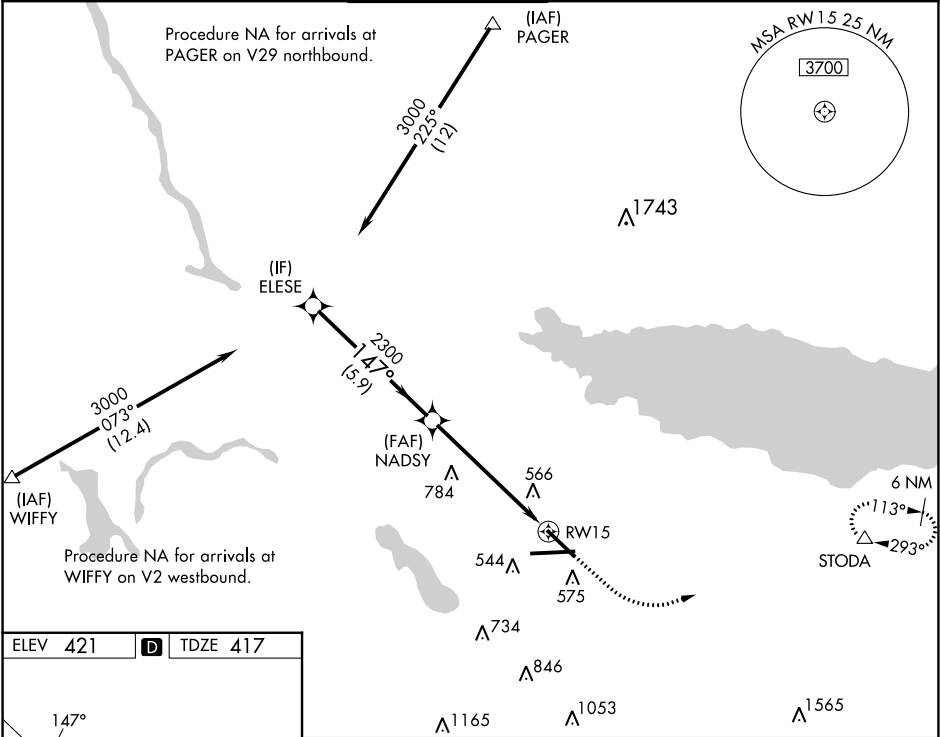

ELEV 421	D	TDZE 417
-----------------	----------	-----------------



TDZ/CL Rwy 28 HIRL Rwy 10-28 and 15-33

ELESE	NADSY	1600	3200	STODA
3000	2300	↑	↶	△
GP 3.00° TCH 53		*1.3 NM to RWY 15		*LNAV only.
5.9 NM	4.5 NM	1.3 NM		
CATEGORY	A	B	C	D
LPV DA	667-¾	250 (300-¾)		
LNAV/VNAV DA	894-1½	477 (500-1½)		
LNAV MDA	880-¾ 463 (500-¾)	880-1½ 463 (500-1½)		
CIRCLING	900-1 479 (500-1)	920-1 499 (500-1)	1020-1½ 599 (600-1½)	1180-2½ 759 (800-2½)