

WAAS
CH **61210**
W31A

APP CRS
313°

Rwy Idg
TDZE **769**
Apt Elev **769**

RNAV (GPS) RWY 31

QUINCY RGNL-BALDWIN FLD (UIN)

RNP APCH.


T

A

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16° C or above 54° C.

MISSED APPROACH:
Climb to 2700 direct
TAVSE and hold.

ASOS 121.425	KANSAS CITY CENTER 126.225 317.775	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

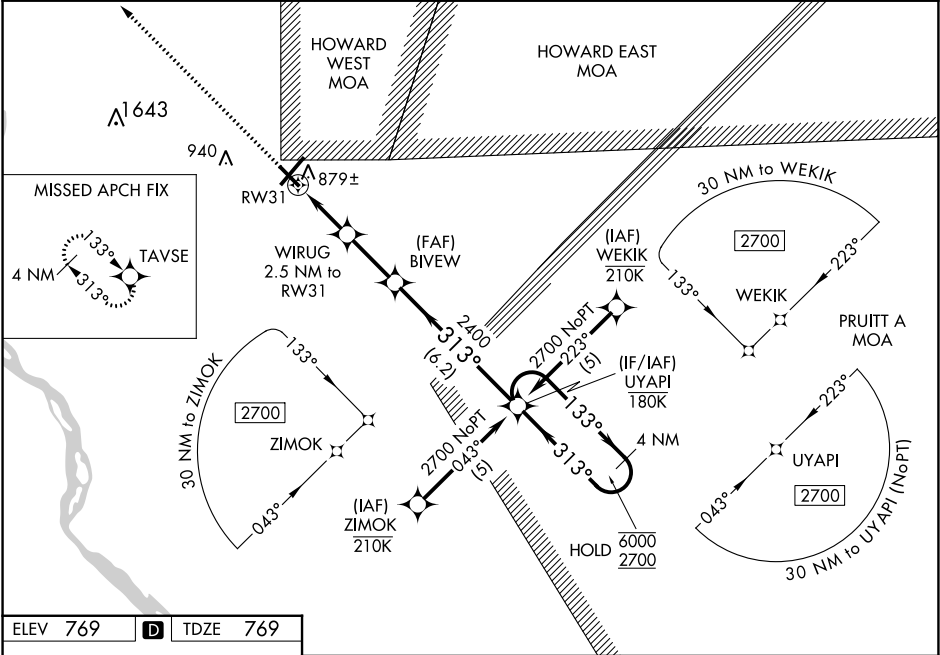

ELEV 769	D	TDZE 769
-----------------	----------	-----------------

2700

TAVSE

*LNAV only.

WIRUG
2.5 NM to
RW31

BIVEW
2400

UYAPI
4 NM
Holding Pattern

13

22

7088 X 150

5397 X 150

820

313°

1 NM

1.5 NM

2.4 NM

6.2 NM

1600

2400

6000

2700

GP 3.00°
TCH 40

CATEGORY	A	B	C	D
LPV DA	1057-1 288 (300-1)			
LNAV/VNAV DA	1168-1½ 399 (400-1½)			
LNAV MDA	1140-1 371 (400-1)			1140-1¼ 371 (400-1¼)
CIRCLING	1180-1 411 (500-1)	1220-1 451 (500-1)	1240-1½ 471 (500-1½)	1320-2 551 (600-2)