

WAAS CH 62923 W28A	APP CRS 283°	Rwy Idg 5402 TDZE 546 Apt Elev 546
--	------------------------	---


RNAV (GPS) RWY 28

ASHLAND RGNL (DWU)


A DME/DME RNP-0.3 NA. When local altimeter setting not received; use Huntington altimeter setting, increase all MDA 80 feet and all Circling visibilities $\frac{1}{4}$ mile. VDP NA when using Huntington altimeter setting.

MISSED APPROACH:
Climb to 3300 direct
NYOME and hold.

AWOS-3PT 132.425	HUNTINGTON APP CON 128.4 270.1	CLNC DEL 121.7	UNICOM 122.8 (CTAF) 1
----------------------------	--	--------------------------	--

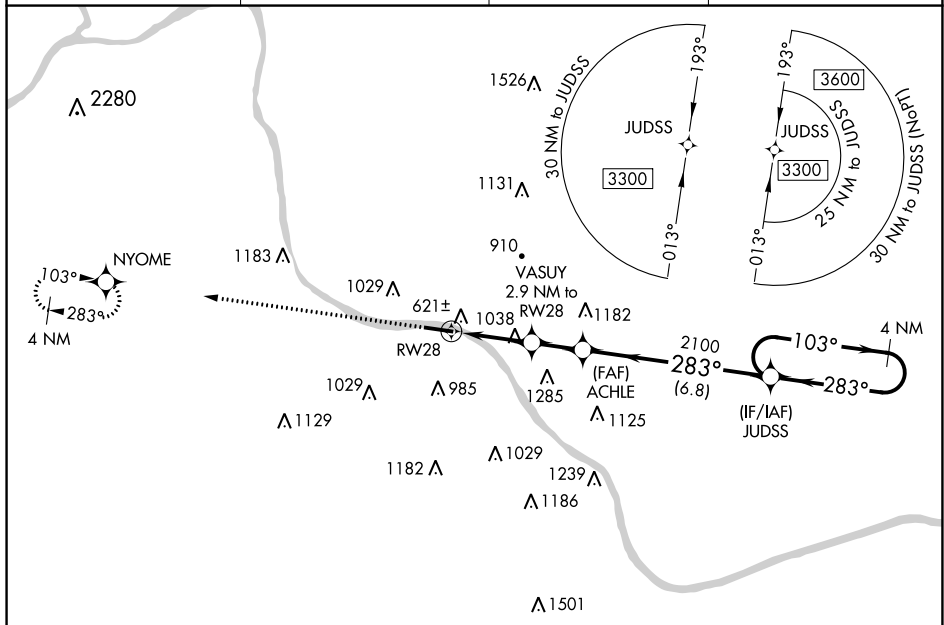

ELEV 546		TDZE 546
----------	--	----------

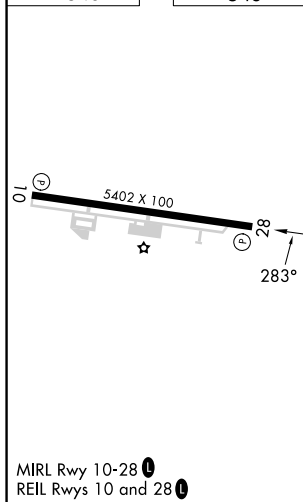

3300		NYOME		Descent Angle NA.				JUDSS		4 NM Holding Pattern	
											
		RW28		1.7 NM to RW28		VASUY 2.9 NM to RW28		ACHLE		283°	
				1500		2100		103°		3300	
		1.7		1.2 NM		1.8 NM		6.8 NM			
CATEGORY		A		B		C		D			
LP MDA		1340-1 794 (800-1)		1340-1¼ 794 (800-1¼)		1340-2½		794 (800-2½)			
LNAV MDA		1340-1 794 (800-1)		1340-1¼ 794 (800-1¼)		1340-2½		794 (800-2½)			
C CIRCLING		1340-1 794 (800-1)		1380-1¼ 834 (900-1¼)		1400-2½ 854 (900-2½)		1420-2¾ 874 (900-2¾)			