


WAAS CH 78032 W18A	APP CRS 181°	Rwy Idg 4098 TDZE 573 Apt Elev 573
--	------------------------	---

RNAV (GPS) RWY 18
SALEM-LECKRONE (SLO)

⚠ Baro-VNAV NA when using Centralia altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). When local altimeter setting not received, use Centralia altimeter setting: increase LPV DA to 801 feet; increase LNAV/VNAV DA to 890 feet and visibility 1/8 SM; increase all MDAs 40 feet and LNAV Cats C/D visibility 1/8 SM and Circling Cats C/D visibility 1/4 SM. DME/DME RNP-0.3 NA.

MISSED APPROACH:
Climb to 2600 direct EMLJ and hold.

AWOS-3PT 118.525	KANSAS CITY CENTER 127.7 351.825	UNICOM 122.725 (CTAF) 0
----------------------------	--	--

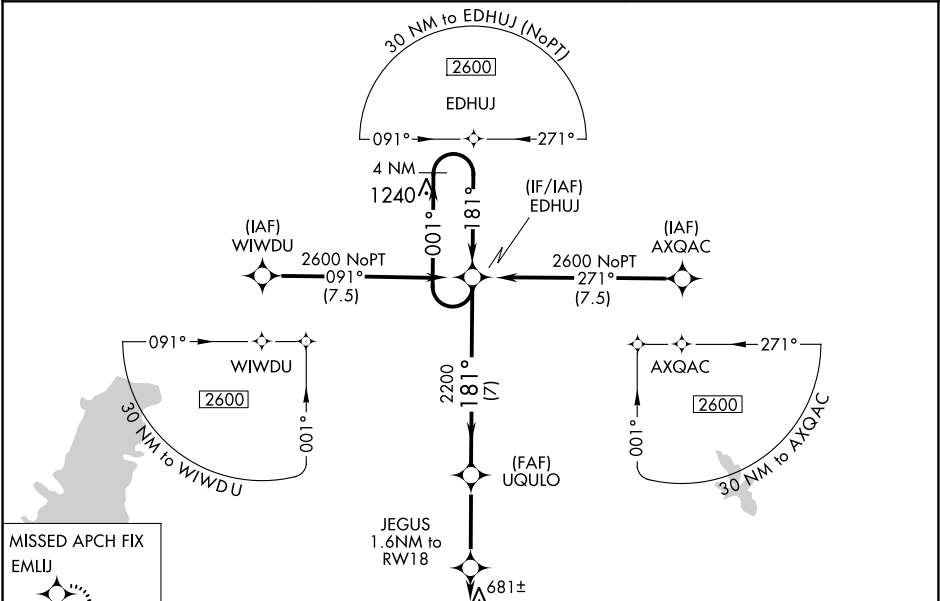

MISSED APCH FIX EMLJ

2600
↑
EMLJ

***LNAV Only**

RW18 to RW18: 1.5 NM, 0.1 NM, 3.4 NM, 7 NM

JEGUS 2200, UQULO 2200, EDHUJ 2600

GP 3.00° TCH 40

CATEGORY	A	B	C	D
LPV DA		773-1	200 (200-1)	
LNAV/VNAV DA		862-1	289 (300-1)	
LNAV MDA		940-1	367 (400-1)	
CIRCLING	1040-1	467 (500-1)	1380-2¼ 807 (900-2¼)	1380-2½ 807 (900-2½)

ELEV 573 | TDZE 573

181°

81

4098 x 75

36

REIL Rwy 18-36 **0**

MIRL Rwy 18-36 **0**