

WAAS CH 40127 W13A	APP CRS 131°	Rwy Idg 5107 TDZE 45 Apt Elev 45
--	------------------------	---


RNAV (GPS) RWY 13

BAY CITY RGNL (BYY)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Rwy 13, 31 helicopter visibility reduction below 1 SM NA. RADAR required. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Palacios altimeter setting and increase all DA 63 feet and all MDA 80 feet; increase LNAV visibility Cat C ¼ mile. VDP and Baro-VNAV N/A when using Palacios altimeter setting.

MISSED APPROACH:
Climb to 2000 direct LEMUR and hold.

AWOS-3 118.075	HOUSTON CENTER 128.6 360.8	UNICOM 122.8 (CTAF) 0
--------------------------	--------------------------------------	---------------------------------

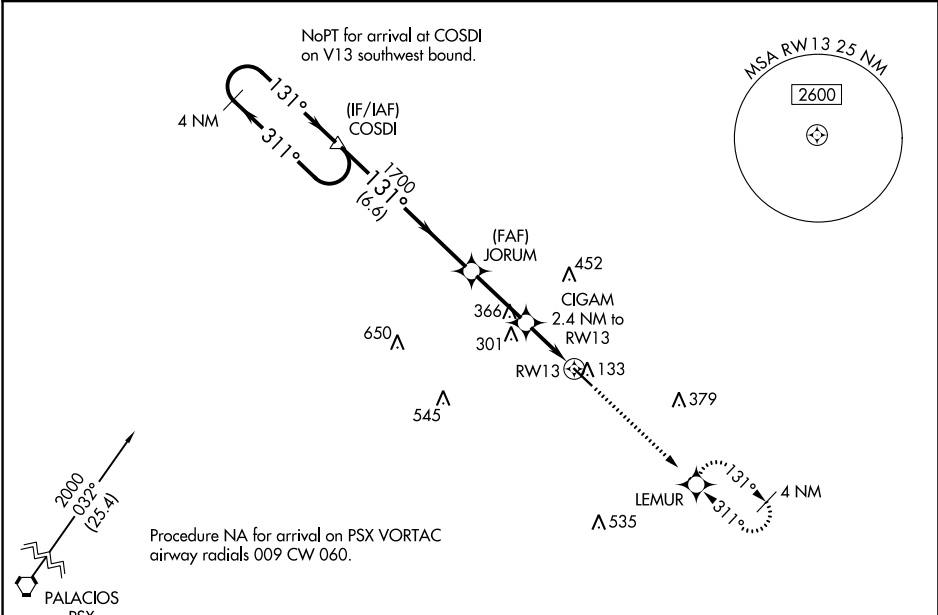

		ELEV 45		TDZE 45	
4 NM Holding Pattern		2000		LEMUR	
GP 3.00° TCH 45		1700		*LNAV only.	
6.6 NM		2.7 NM		1.6	
CATEGORY		A		B	
LPV DA		295-1		250 (300-1)	
LNAV/VNAV DA		295-1		250 (300-1)	
LNAV MDA		460-1		415 (500-1)	
CIRCLING		500-1		455 (500-1)	

