

WAAS
CH 42818
W25A

APP CRS
246°

Rwy Idg
TDZE 147
Apt Elev 147

RNAV (GPS) RWY 25


MARLBORO COUNTY JETPORT-H E AVENT FLD (BBP)

RNP APCH.

Baro-VNAV NA when using Florence altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 47°C. Rwy 25 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Florence altimeter setting and increase all DA 61 feet and MDA 80 feet. Increase LPV all Cats, and LNAV Cat C and D visibility ¼ mile.

MISSED APPROACH: Climb to 2500 direct LONCI and hold.

AWOS-3PT 123.825	FLORENCE APP CON ★ 118.6 341.7	UNICOM 122.8 (CTAF)
---------------------	-----------------------------------	------------------------

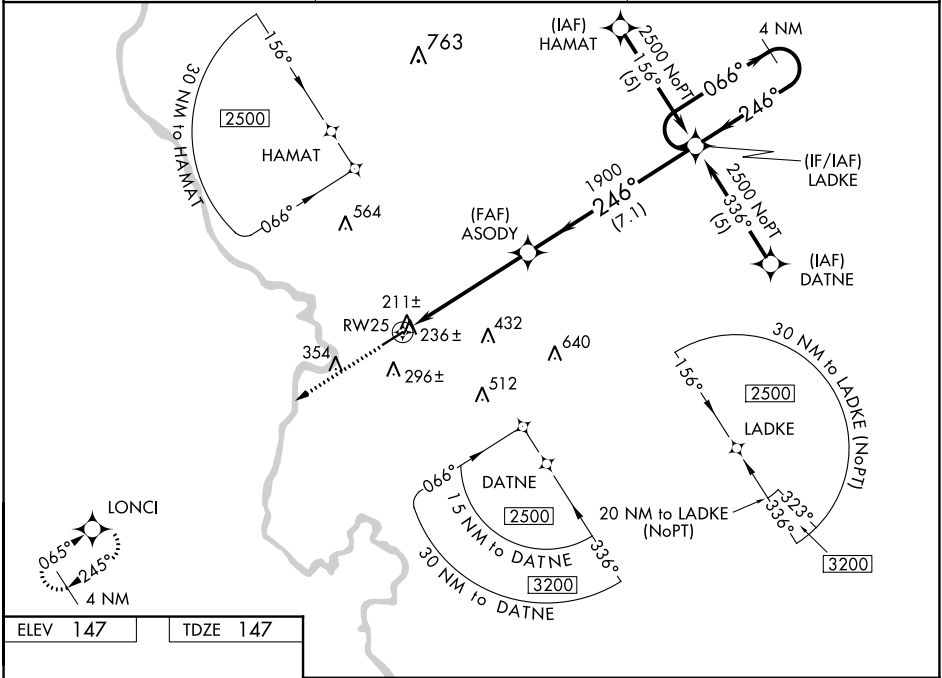

ELEV 147

TDZE 147

246° to RWY 25

5003 X 74

2500

LONCI

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 40).

ASODY

LADKE

246°

1900

5.3 NM

7.1 NM

CATEGORY	A	B	C	D
LPV	DA	441-1	294 (300-1)	
LNAV/VNAV	DA	621-1¾	474 (500-1¾)	
LNAV	MDA	680-1	533 (600-1)	680-1½ 533 (600-1½)
			680-1¾ 533 (600-1¾)	