

WAAS
CH **53303**
W26A

APP CRS
263°

Rwy Idg
TDZE
Apt Elev

5102
3254
3279

RNAV (GPS) RWY 26

SEARLE FLD (OGA)

RNP APCH.


When local altimeter setting not received, use Imperial altimeter setting and increase all DA 86 feet and all MDA 100 feet, increase LPV all Cats visibility 1/8 SM, LNAV/VNAV all Cats and Circling Cat B visibility 1/4 SM. VDP and Baro-VNAV NA when using Imperial altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C.

MISSED APPROACH:
Climb to 5300 direct AHUFU and hold.

AWOS-3
121.275

DENVER CENTER
132.7 397.85

UNICOM
122.8 (CTAF)

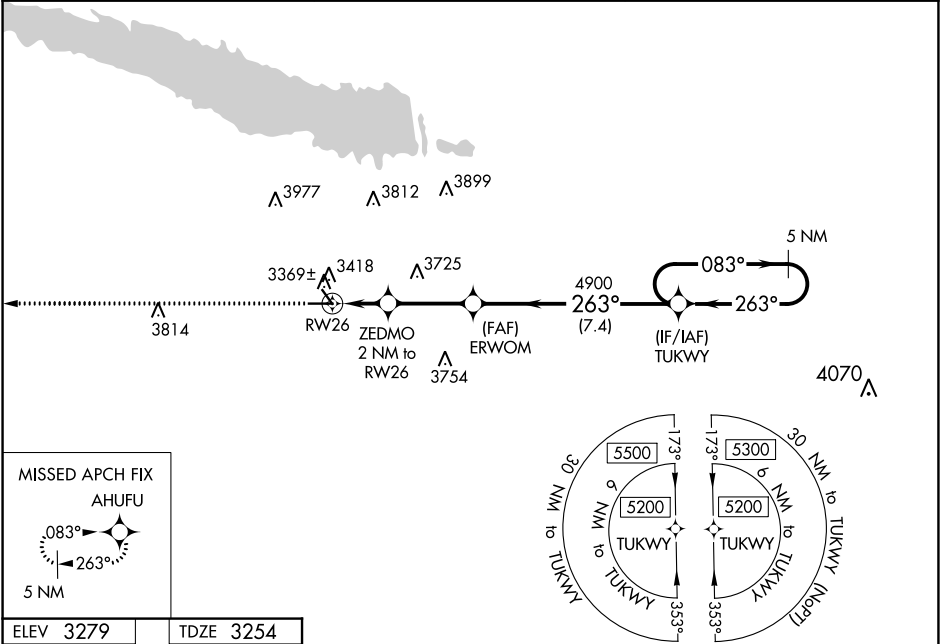

ELEV **3279**

TDZE **3254**

5300

AHUFU

*LNAV only.

RW26

3900*

ZEDMO

2 NM to RW26

ERWOM

4900

TUKWY

5 NM Holding Pattern

083° → 5200

← 263°

GP 3.00°

TCH 48

1 NM

1 NM

3.1 NM

7.4 NM

CATEGORY	A	B	C	D
LPV DA	3504-1	250 (300-1)	NA	
LNAV/VNAV DA	3540-1	286 (300-1)	NA	
LNAV MDA	3620-1	366 (400-1)	NA	
CIRCLING	3940-1 661 (700-1)	4000-1 721 (800-1)	NA	