



WAAS CH 70717 W12A	APP CRS 116°	Rwy Idg TDZE Apt Elev	5500 2114 2135	RNAV (GPS) RWY 12 WATFORD CITY MUNI (S25)
--	------------------------	-----------------------------	---	---

RNP APCH-GPS.	MISSED APPROACH: Climb to 4300 direct CIPGO and hold.
▼ ▲NA Rwy 12 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Williston altimeter setting and increase LPV DA to 2474 feet; increase all MDAs 120 feet and RNAV visibility Cat C/D ¾ SM, and Circling visibility Cat C/D ½ SM.	

AWOS-3PT 118.125	SALT LAKE CENTER 126.85 305.2	UNICOM 122.8 (CTAF) 0
----------------------------	---	---------------------------------

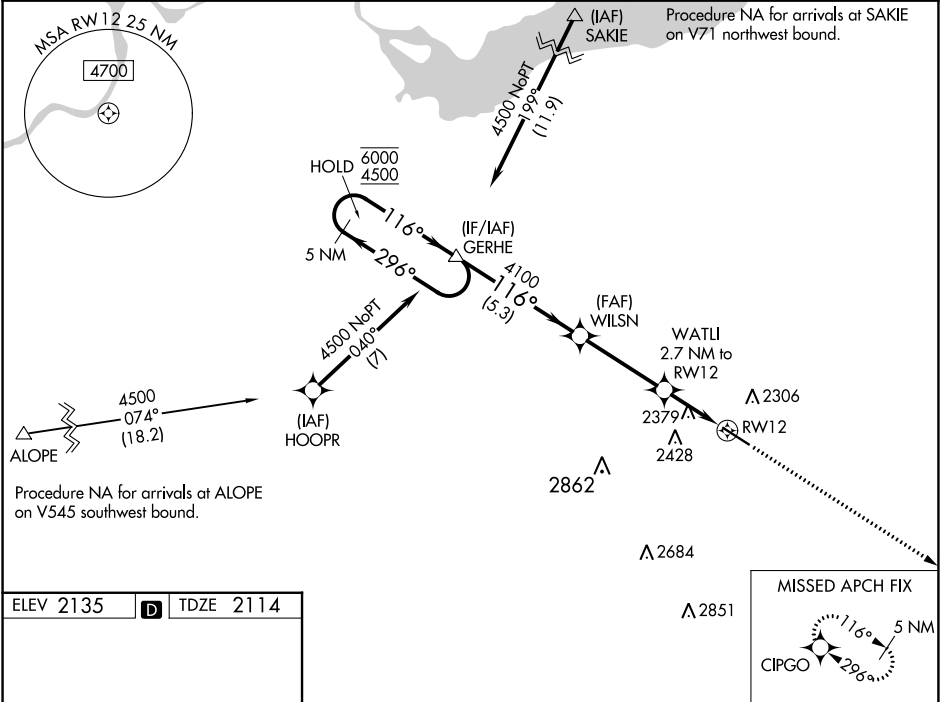

ELEV 2135	D	TDZE 2114
-----------	----------	-----------

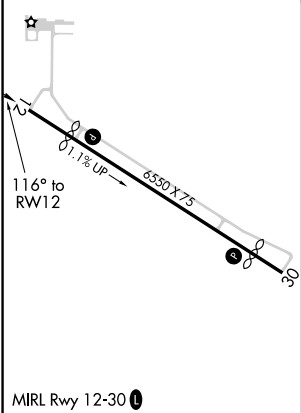

5 NM Holding Pattern	GERHE	WILSN	WATLI 2.7 NM to RW12	4300	CIPGO
6000 4500	←296° 116°→	116°	4100	2960	1.7 NM to RW12
GP 3.00° TCH 40	5.3 NM	3.6 NM	1 NM	1.7 NM	
CATEGORY	A	B	C	D	
LPV DA	2364-1 250 (300-1)				
LNAV MDA	2640-1	526 (600-1)	2640-1½	526 (600-1½)	
C CIRCLING	2700-1 565 (600-1)	2760-1 625 (700-1)	2760-1¾ 625 (700-1¾)	2960-2¾ 825 (900-2¾)	